2020

AUTOMOTIVE CATALOGUE





NEWS 2020



LESS PLASTIC IN OUR OCEANS

"Every year approximately 8 million tons of plastic waste ends up in the oceans and if no measure will be taken, there would be more plastic then fishes in the sea by 2050." (source: WWF).

ERRECOM has always been attentive to the environment and has decided to act concretely and give its contribution, reducing more and more the use of plastic packaging.

In this catalogue you can find out that the products that were packed in clamshell packaging are now packed in recycled cardboard.


We are sure that our customers will appreciate our commitment and will share our choice, preferring this new type of packaging.



Push&Fill



L^{FQ} **FixQuick** Ultrafast Fluorescent UV Leak Stop

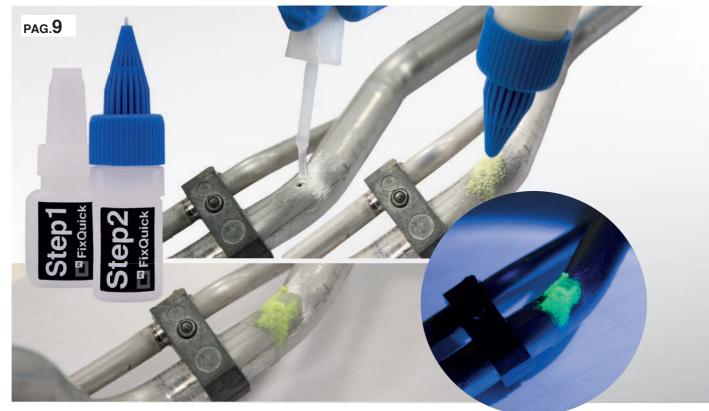



Atom Ultra - No Odor

Anti-odor Treatment for Atom Machine





Monsoon - No Odor

High-pressure Scented Spray for Cockpit and Air Filter



Monsoon I - No Odor

600 mL e


Ultra Cleaning TECHNOLOGY










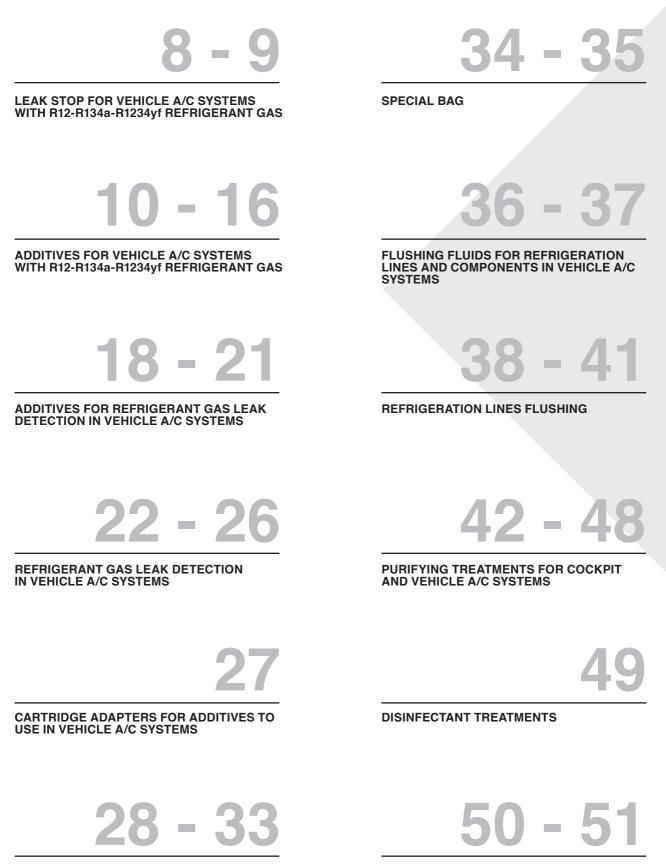

LUBRICANTS FOR VEHICLE A/C SYSTEMS

EVAPORATORS CLEANING TREATMENTS

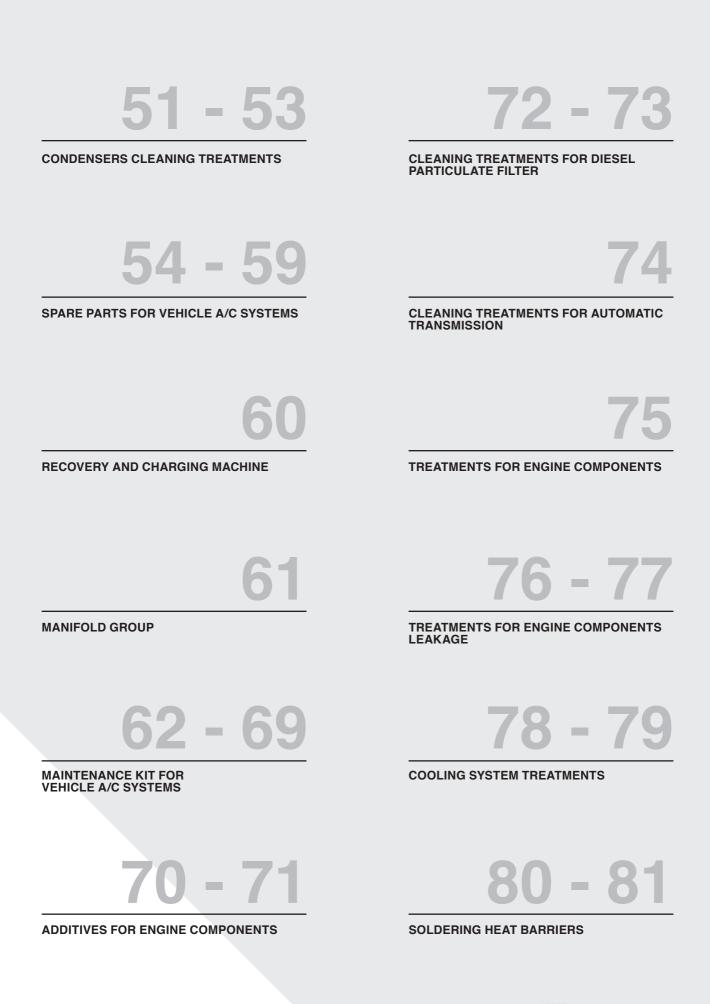

**80x120xH200 cm



01

Leak Stop for Vehicle A/C Systems

EXTREME ULTRA is the ultimate refrigerant gas leak stop that solves all the problems related to refrigerant gas microleakages in vehicles A/C systems. After thousands of tests and more than 4 years of research & development efforts, Errecom designed a 6 mL dose leak stop that can work with all types of refrigerant gases. EXTREME ULTRA 6 mL brand-new formula is a single dose to repair the vehicles A/C systems. single dose to repair the vehicles A/C systems.

How does it work?

EXTREME ULTRA locates the refrigerant gas leaks and permanently seals them, without reacting to moisture and oxygen. EXTREME ULTRA is a polymer-free solution that repairs leaks up to 0.3 mm.

Benefits:

- ✓ 6 mL advanced formula, less product in the system.
- Universal dose for every vehicle A/C system.
 It permanently seals refrigerant gas leaks both
- in metal and rubber components of vehicles A/C ✓ Polymer-free. Non-reactive to humidity and
- Safe for vehicle A/C system components
 Visible to any UV Lamp.
 Not flammable, not irritant, safe for the operator.

- ✓ It significantly reduces compressor noise. ✓ Ideal for preventative maintenance.

CartridGe TECHNOLOGY:

✓ Compatible with all refrigerant gases, including R12, R134a and R1234yf.

Push&Fill TECHNOLOGY:

✓ Compatible with Refrigerant Gases R134a and R1234yf.

đ

✓ Thanks to the difference in pressure between the product and the A/C system of the vehicle, the insertion is safe, easy and fast.





CartridGe TECHNOLOGY:

ArtNr.	Adapters	€	8	***
TR1163.AL.01.S2	No	-	30	5400
TR1163.AL.H1.S2	A + B (R134a)	-	30	5400
TR1163.AL.H7.S2	A + C (R1234yf)	-	30	5400
TR1163.AL.H2.S2	A + B + C (R134a + R1234yf)	-	30	5400

Push&Fill TECHNOLOGY:

ArtNr.	Adapters	£	2	**	i
ArtNi.	Adaptera	-			
PF1163.Y.01.S2	No	-	-	-	
PF1163.Y.H1.S2	A + B (R134a)	-	-	-	
PF1163.Y.H7.S2	A + C (R1234yf)	-	-	-	
PF1163.Y.H2.S2	A + B + C (R134a + R1234yf)	-	-	-	

ADAPTERS



B R134a



A FLEX HOSE

© R1234yf

FixQuick



Ultra-fast UV Fluorescent Leak Stop


FIXQUICK is the new ultra-fast leak stop by Errecom, specifically formulated to repair in max 30 seconds leaks up to 1 mm in diameter on flat and curved surfaces. It guarantees a seal up to 50 Bar pressure and 250°C. It can be used on metals and plastic components of vehicle A/C systems. Its fluorescent formulation allows to easily check the status of the performed fixing using a UV lamp and to identify any previous repairs.

How does it work?

The product can be applied both on a curved and flat surface, which must be perfectly dry and clean. It is recommended to use THOR to clean the surface (p.55). Apply in sequence on the leakage area the STEP1 liquid product, then STEP2 powder and again STEP1 to make the fixing uniform. Wait 20" for a repair that can withstand a pressure of 20 Bar or 20 min to withstand a pressure of 50 Bar.

Benefits:

✓ It can be used both on metals and plastic materials. ✓ It can be used on flat or curved surfaces. ✓ In 20 seconds it seals the leak resisting to a pressure up to 20 Bar. ✓ In 20 minutes it seals the leak resisting to a pressure up to 50 Bar. ✓ It resists up to 250°C. ✓ It is visible with UV lamp.

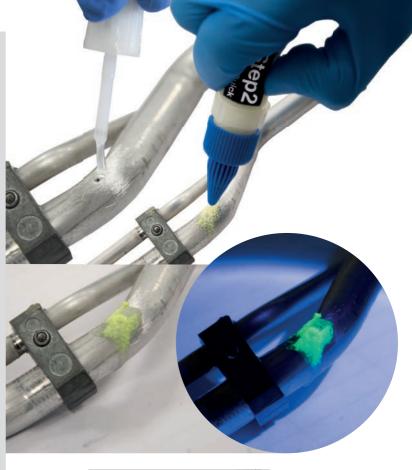

 Art.-Nr.
 €
 ¥
 ◆*

 TR1180.01

External

03.

Bicomponent Paste Leak Stop

EXTERNAL is a bicomponent paste leakstop that has to be applied externally on the components of vehicle A/C systems. It is recommended to use THOR for surface cleaning before its application (p.55). Designed to effectively seal all types of leaks up to 5 mm that occur on metal and rubber components of vehicle A/C systems, EXTERNAL is resistant to lubricants, additives and refrigerant gases. It resists to temperature leap and can be used indifferently both on high and low pressure sides (hot or cold).

Benefits:

 ✓ It can be used on metal components of vehicle A/C system such as copper, aluminum and steel. ✓ It can be used on thermoplastic pipes.
 ✓ It resists to mineral lubricants, POE, PAG, PAO and AlkylBenzene. ✓ It resists to refrigerant gases CFC, HFC, HCFC, CO₂ including R32 and R1234yf. ✓ It resists to flushing fluids, including Chlorinate. ✓ It withstands a temperature range from -100°C to + 270°C. The pressure resistance depends on the size of the leak:

5 mm = 40 Bar. 2 mm = 50 Bar. 1 mm = 57 Bar.





 Art.-Nr.
 €
 ❤

 TR1166.01
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60
 60









Cool-Shot Ultra

Performance Enhancer for Vehicle A/C Systems

COOL-SHOT ULTRA is a synthetic catalyst to maintain and restore the efficiency of all vehicle A/C systems, avoiding the formation of "Oil Fouling" if used in new systems or eliminating this phenomenon if inserted in already working ones.

How does it work?

COOL-SHOT ULTRA is composed of two synthetic catalysts and a lubricating agent. If used in a preventive manner it prevents the oil from settling on the walls of the system. If used in a resolutive manner instead, it removes the oil that has settled on the walls of the system during the years of use, it solubilizes it and brings it again to the compressor. Moreover, it increases the effectiveness of the compressor lubricant and does not cause any chemical modification. It extends the life of the compressor. It significantly reduces compressor noise. It reduces plant maintenance costs and CO_2 emissions. It does not atter the refrigerant gases including CO_2 . It is suitable for all types of vehicle A/C systems. Visible if exposed to UV light. 6 mL is the Universal dose for every vehicle A/C system.

Benefits:

Cool-Shot U

FOR PREVENTIVE USE IN NEW SYSTEMS:

✓ It avoids the formation of the "Oil Fouling" phenomenon.✓ It maintains the performance of the system.

FOR USE IN A RESOLUTIVE FORM IN WORKING SYSTEMS:

- It eliminates the "Oil Fouling" phenomenon by restoring the initial performance of the system
- ✓ It restores the heat exchange of the refrigeration lines.
- ✓ It reduces the energy consumption of the system.


CartridGe TECHNOLOGY:

 Compatible with all refrigerant gases, including R12, R134a and R1234yf.

Push&Fill TECHNOLOGY:

R1234vf con

 Compatible with refrigerant gases R134a and R1234yf.
 Thanks to the difference in pressure between the product and the A/C system of the vehicle, the insertion is safe, easy and fast.

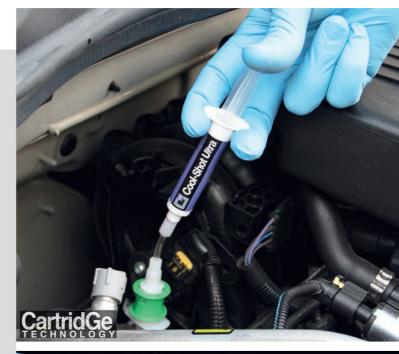



CartridGe TECHNOLOGY:

ArtNr.	Adapters	€	8	***
TR1170.AL.01.S2	No	-	30	5400
TR1170.AL.H1.S2	A + B (R134a)	-	30	5400
TR1170.AL.H7.S2	A + C (R1234yf)	-	30	5400
TR1170.AL.H2.S2	A + B + C (R134a + R1234yf)	-	30	5400

Push&Fill TECHNOLOGY:

	ArtNr.	Adapters	€	8	***
	PF1170.Y.01.S2	No	-	-	-
	PF1170.Y.H1.S2	A + B (R134a)	-	-	-
	PF1170.Y.H7.S2	A + C (R1234yf)	-	-	-
-	PF1170.Y.H2.S2	A + B + C (R134a + R1234yf)	-	-	-

ADAPTERS





A FLEX HOSE

© R1234yf

Super-Dry Ultra

Anti-Moisture Additive

SUPER-DRY ULTRA is a dehydrating additive able to prevent the formation of moisture in vehicle A/C systems.

How does it work?

SUPER-DRY ULTRA contains special chemical components that stabilize the lubricant and prevent the creation of moisture in vehicle A/C systems.

Benefits:

02.

Super-Dry Ultra

- ✓ 6 mL advanced formula, less product in the system.
- ✓ Universal dose for every vehicle A/C system.
- \checkmark It eliminates definitively the A/C systems moisture.
- ✓ Safe for all gaskets and vehicle A/C system components.
- ✓ It does not affect the power and the performance of the system.
- \checkmark It helps preventing the formation of acid.
- ✓ Methanol and solid particles free.
- ✓ Safe for compressor and A/C recovery units.
- ✓ Once introduced into the vehicle A/C systems it circulates conveyed from the refrigerant gas without affecting its features.

CartridGe TECHNOLOGY:

✓ Compatible with all refrigerant gases, including R12, R134a and R1234yf.

Push&Fill TECHNOLOGY:

R1234vf compatible

31

=--

- ✓ Compatible with refrigerant gases R134a and R1234yf.
- ✓ Thanks to the difference in pressure between the product and the A/C system of the vehicle, the insertion is safe, easy and fast.





CartridGe TECHNOLOGY:

ArtNr.	Adapters	€	B	* **
TR1174.AL.01.S2	No	-	30	5400
TR1174.AL.H1.S2	A + B (R134a)	-	30	5400
TR1174.AL.H7.S2	A + C (R1234yf)	-	30	5400
TR1174.AL.H2.S2	A + B + C (R134a + R1234yf)	-	30	5400

Push&Fill TECHNOLOGY:

* **	
-	
-	
-	
-	
	-

ADAPTERS



B R134a



A FLEX HOSE

© R1234yf



.

E.

11



03.

Acid Neutralizer Additive

NO-ACID ULTRA is a neutralizer able to completely eliminate residues of acid in vehicle A/C systems to prevent compressor burnout.

How does it work?

The chemical ingredients of NO-ACID ULTRA bond to the residues of acid present in the system, and eliminate them. These residues might be caused by refrigerant gas or lubricant breakdown, moisture and compressor burnout. Once introduced inside the system NO-ACID ULTRA prevents the formation of acid.

Benefits:

- ✓ 6 mL advanced formula, less product in the system
- ✓ It completely eliminates acid in vehicle A/C systems
- ✓ It neutralises possible acid residues caused by A final and a possible data compressor burnout.
 ✓ Safe for A/C recovery units
- Safe for system components. ✓ Ideal for preventative maintenance; fast and
- immediate effect.

Dosis:

PREVENTIVE USE: 6 mL universal dose for every vehicle A/C system.

RESOLUTIVE USE: it is recommended to use Errecom ACID-TEST to set the best quantity of NO-ACID ULTRA as correction in all vehicle A/C systems.

CartridGe TECHNOLOGY:

✓ Compatible with all refrigerant gases, including R12, R134a and R1234yf.

Push&Fill TECHNOLOGY:

R134a - R1234yf COMPATIBLE

cid

Push&Fill

✓ Compatible with refrigerant gases R134a and R1234yf. Thanks to the difference in pressure between the product and the A/C system of the vehicle, the insertion is safe, easy and fast.





CartridGe TECHNOLOGY:

ArtNr.	Adapters	€	8	***
TR1175.AL.01.S2	No	-	30	5400
TR1175.AL.H1.S2	A + B (R134a)	-	30	5400
TR1175.AL.H7.S2	A + C (R1234yf)	-	30	5400
TR1175.AL.H2.S2	A + B + C (R134a + R1234yf)	-	30	5400

Push&Fill TECHNOLOGY:

	ArtNr.	Adapters	€	8	***
	PF1175.Y.01.S2	No	-	-	-
	PF1175.Y.H1.S2	A + B (R134a)	-	-	-
	PF1175.Y.H7.S2	A + C (R1234yf)	-	-	-
Di	PF1175.Y.H2.S2	A + B + C (R134a + R1234yf)	-	-	-

ADAPTERS



B R134a



A FLEX HOSE

© R1234yf

Acid-Test

04.

Test to verify the Presence of Acid in A/C **Compressors Lubricant**

ACID-TEST is an essential product to locate the presence and the formation of acid inside vehicle A/C Systems. The use of ACID-TEST is a very important step in a regular preventative maintenance and provides a fast and accurate method to detect the presence of acid into compresent alies. compressor oils


How does it work?

ACID-TEST contains chemical ingredients that react when in contact with acidity, changing their color and indicating the nominal pH level of compressor oil.

Benefits:

- ✓ It works with all lubricants (POE ABZ PAO PAG -PVE - Mineral).
 Accurate results in seconds.
- ✓ Easy to use.
- ✓ Biodegradable.
- ✓ Non-flammable.
- ✓ Non-toxic. ✓ Non-hazardous.
- ✓ The box contains 4 TESTS.





ArtNr.	€	8	***
RK1349.S1	-	12	2160





CAC/R Restoring Treatment



Reconditioning Treatment to Repair Refrigerant Gas Leaks in A/C Systems in Definitive Way

AC/R RESTORING TREATMENT is the unique complete treatment on the market developed to permanently repair refrigerant gas leaks in vehicles A/C systems. It is known that the main cause of refrigerant gas leaks in a system is the formation of moisture which causes the formation of acid in the lubricant. The acid, once deposited, begins a slow and constant process of corrosion that will lead to the leak of refrigerant gas. Using the leak stop only, the leak will be indeed repaired, but the chemical process that caused it won't be stopped.

How does it work?

Thanks to the sequential insertion of the 4 additives of AC/R RESTORING TREATMENT, the vehicles A/C systems will be completely protected against the loss of refrigerant gas and against damages caused by the formation of acid, against humidity and the phenomenon of Oil-Fouling. The 4 essential additives of the Ultra line can be introduced as one single solution in vehicles A/C systems: alltogether, in fact, they have a dosage of only 24 mL.

Benefits:

- It permanently repairs the refrigerant gas leaks eliminating the main causes for them.
 It eliminates moisture, acidity and oil fouling from the systems.
- ✓ It restores the original performance of the system.

ArtNr.	Description	€	8	***
RK1421	Clamshell No Adapters	-	20	1120
RK1421.H1	Clamshell with R134a adapter	-	20	1120
RK1421.H7	Clamshell with R1234yf adapter	-	20	1120
RK1421.H2	Clamshell with R134a + R1234yf adapters	-	20	1120



ADAPTERS







R134a







Compressor +

06.

Reconditioning Additive

COMPRESSOR+ is the additive that restores the optimal working conditions of the vehicles A/C systems once you have replaced the compressor or flushed the circuit. Due to the break of a compressor, different contaminants get inside the circuit (Hydrofluoric, Hydrochloric and Carbonic acid, such as moisture and heavy residues of flushing fluid) that affect significantly the duration of the main components of the system. Before providing the installation of a new A/C compressor, it is necessary to disassemble the different parts of the circuit and flush them with a flushing fluid which ensure the removal of these contaminants.

How does it work?

COMPRESSOR+, directly added in the lubricant that will be introduced in the new compressor, catches and inhibits all those particles that can be dangerous for the new components. COMPRESSOR+ precisely neutralizes and incorporates these contaminants, immediately guaranteeing the maximum efficiency and eliminating the possibility of future damages.

Benefits:

✓ It eliminates and completely neutralizes the contaminants in the vehicle A/C systems.

- ✓ It works very fast.
- It does not damage the system components.
- ✓ Ideal for preventive applications.

Dosage:

6 mL up to 400 mL of lubricant.



ArtNr.	Description	€	8	* **
TR1162.AL.01.S2	Cartridge of 6 mL	-	30	5400
TR1162.L.01.S2	Cartridge of 12 mL	-	30	5400
TR1162.C.01.S2	Cartridge of 30 mL	-	24	4320
TR1162.QC.01.S2	Cartridge of 45 mL	-	24	4320
TR1162.E.01.S2	Cartridge of 60 mL	-	24	4320



REFRIGERANT GAS LEAK DETECTOR DYE FOR VEHICLE A/C SYSTEMS

Brilliant

Yellow Fluorescent UV Leak Detector Dye for Vehicle A/C Systems with R12 - R134a - R1234yf & for Electric Compressors

BRILLIANT is a fluorescent UV dye for vehicles A/C systems with R12, R134a, R1234yf & for electric compressors. It allows to quickly and accurately locate refrigerant gas leaks.

How does it work?

BRILLIANT has to be introduced in the vehicles A/C system; at the leak point the product will get out and stand out when lit by a UV Lamp.

Benefits:

Brilliant

01

✓ It precisely locates refrigerant gas leaks. ✓ Solventfree. ✓ It complies with SAE J2297 & SAE J2298. ✓ It does not clog A/C system or recovery units. ✓ Visible to any UV lamp. ✓ It includes advice stickers.



06 Cartridges of 7,5 mL in Clamshell packaging

ArtNr.	Description	€	8	** *
TR1058.A6.01	No Adapters	-	20	1120
TR1058.A6.H1	R134a Adapter	-	20	1120
TR1058.A6.H7	R1234yf Adapter	-	20	1120
TR1058.A6.H2	R134a + R1234yf Adapt.	-	20	1120
12 Cartridges of	7,5 mL in Clamshell pack	aging		
ArtNr.	Description	€	8	*
TR1058.01	No Adapters	-	12	672
TR1058.H1	R134a Adapter	-	12	672
TR1058.H7	R1234yf Adapter	-	12	672
TR1058.H2	R134a + R1234yf Adapt.	-	12	672
00.0				
06 Cartridges of	7,5 mL in Plastic Bag			
06 Cartridges of ArtNr.	7,5 mL in Plastic Bag Description	€	B	**
-	· •	€ -	¥ 25	* 1400
ArtNr.	Description	€ - -	-	-
ArtNr. TR1058.A6.01.P1	Description No Adapters	-	25	1400
ArtNr. TR1058.A6.01.P1 TR1058.A6.H1.P1	Description No Adapters R134a Adapter	-	25 25	1400 1400
ArtNr. TR1058.A6.01.P1 TR1058.A6.H1.P1 TR1058.A6.H7.P1 TR1058.A6.H2.P1	Description No Adapters R134a Adapter R1234yf Adapter R134a + R1234yf Adapt.	-	25 25 25	1400 1400 1400
ArtNr. TR1058.A6.01.P1 TR1058.A6.H1.P1 TR1058.A6.H7.P1 TR1058.A6.H2.P1 12 Cartridges of	DescriptionNo AdaptersR134a AdapterR1234yf AdapterR134a + R1234yf Adapt.7,5 mL in Plastic Bag	-	25 25 25 25 25	1400 1400 1400
ArtNr. TR1058.A6.01.P1 TR1058.A6.H1.P1 TR1058.A6.H7.P1 TR1058.A6.H2.P1	Description No Adapters R134a Adapter R1234yf Adapter R134a + R1234yf Adapt.	-	25 25 25	1400 1400 1400
ArtNr. TR1058.A6.01.P1 TR1058.A6.H1.P1 TR1058.A6.H7.P1 TR1058.A6.H2.P1 12 Cartridges of	DescriptionNo AdaptersR134a AdapterR1234yf AdapterR134a + R1234yf Adapt.7,5 mL in Plastic Bag	-	25 25 25 25 25	1400 1400 1400
ArtNr. TR1058.A6.01.P1 TR1058.A6.H1.P1 TR1058.A6.H7.P1 TR1058.A6.H2.P1 12 Cartridges of T ArtNr.	Description No Adapters R134a Adapter R1234yf Adapter R134a + R1234yf Adapt. 7,5 mL in Plastic Bag Description	-	25 25 25 25	1400 1400 1400 1400



Self-Measuring Container

ArtNr.	Description	€	8	***
TR1A03.01.S1	1 Litre	-	06	504
TR1103.01.S1	350 mL	-	12	1536
TR1003.01.S1	250 mL	-	12	1920
TR1119.F.S1	100 mL	-	12	-

TR1058.H2.P1 R134a + R1234yf Adapt. - 25 1400

Green Brilliant

02 Green Fluorescent UV Leak Detector Dye for Vehicle A/C Systems with R12 - R134a - R1234yf & for Electric Compressors

GREEN BRILLIANT is a fluorescent UV dye for vehicles A/C systems with R12, R134a, R1234yf & for electric compressors. It allows to quickly and accurately locate refrigerant gas leaks.

How does it work?

GREEN BRILLIANT has to be introduced in the vehicles A/C system; at the leak point the product will get out and stand out when lit by a UV Lamp.

Benefits:

Green Brilliant

✓ It precisely locates refrigerant gas leaks. ✓ Solventfree. ✓ It complies with SAE J2297 & SAE J2298. ✓ It does not clog A/C system or recovery units. ✓ Visible to any UV lamp. ✓ It includes advice stickers.

Green Brilliant



06 Cartridges of 7,5 mL in Clamshell packaging

ArtNr.	Description	€	8	* **
TR1059.A6.01	No Adapters	-	20	1120
TR1059.A6.H1	R134a Adapter	-	20	1120
TR1059.A6.H7	R1234yf Adapter	-	20	1120
TR1059.A6.H2	R134a + R1234yf Adapt.	-	20	1120

12 Cartridges of 7,5 mL in Clamshell packaging

Description	€	¥	***
No Adapters	-	12	672
R134a Adapter	-	12	672
R1234yf Adapter	-	12	672
R134a + R1234yf Adapt.	-	12	672
	No Adapters R134a Adapter R1234yf Adapter	No Adapters - R134a Adapter - R1234yf Adapter -	No Adapters - 12 R134a Adapter - 12 R1234yf Adapter - 12

06 Cartridges of 7,5 mL in Plastic Bag

ArtNr.	Description	€	8	***
TR1059.A6.01.P1	No Adapters	-	25	1400
TR1059.A6.H1.P1	R134a Adapter	-	25	1400
TR1059.A6.H7.P1	R1234yf Adapter	-	25	1400
TR1059.A6.H2.P1	R134a + R1234yf Adapt.	-	25	1400

12 Cartridges of 7,5 mL in Plastic Bag

-	_			
ArtNr.	Description	€	8	***
TR1059.01.P1	No Adapters	-	25	1400
TR1059.H1.P1	R134a Adapter	-	25	1400
TR1059.H7.P1	R1234yf Adapter	-	25	1400
TR1059.H2.P1	R134a + R1234yf Adapt.	-	25	1400

Self-Measuring Container

ArtNr.	Description	€	8	*
TR1034.01.S1	1 Litre	-	06	504
TR1033.01.S1	350 mL	-	12	1536
TR1032.01.S1	250 mL	-	12	1920
TR1120.F.S1	100 mL	-	12	-



19

Blue Brilliant

03.

Fluorescent UV Leak Detector Dye for Vehicle A/C Systems with R1234yf & for Electric Compressors

BLUE BRILLIANT is a fluorescent UV leak detector dye for vehicles A/C systems with R1234yf and electric compressors. It complies with SAE J2297 REV. dated 14/01/2013. It allows to quickly and accurately locate refrigerant gas leaks.

How does it work?

BLUE BRILLIANT has to be introduced in the vehicles A/C system; at the leak point the product will get out and stand out when lit by a UV lamp.

Benefits:

✓ It precisely locates refrigerant gas leaks. ✓ Solventfree. ✓ It complies with SAE J2297 & SAE J2298. ✓ It does not clog A/C system or recovery units. ✓ Visible to any UV lamp. ✓ It includes advice stickers.





06 Cartridges of 7,5 mL in Clamshell packaging

ArtNr.	Description	€	8	***
TR1121.A6.01	No Adapters	-	20	1120
TR1121.A6.H7	R1234yf Adapter	-	20	1120

12 Cartridges of 7,5 mL in Clamshell packaging

ArtNr.	Description	€	F	* **
TR1121.A12.01	No Adapters	-	12	672
TR1121.A12.H7	R1234yf Adapter	-	12	672

06 Cartridges of 7,5 mL in Plastic Bag

ArtNr.	Description	€	8	***
TR1121.A6.01.P1	No Adapters	-	25	1400
TR1121.A6.H7.P1	R1234yf Adapter	-	25	1400

12 Cartridges of 7,5 mL in Plastic Bag

ArtNr.	Description	€	8	***
TR1121.A12.01.P1	No Adapters	-	25	1400
TR1121.A12.H7.P1	R1234yf Adapter	-	25	1400



Self-Measuring Container

ArtNr.	Description	€	8	* **
TR1121.K.S1	1 Litre	-	06	504
TR1121.O.S1	350 mL	-	12	1536
TR1121.Q.S1	250 mL	-	12	1920
TR1121.F.S1	100 mL	-	12	-

Red Brilliant

04.

Fluorescent UV Leak Detector Dye POE based for Electric Compressors

RED BRILLIANT is a fluorescent UV leak detector dye for vehicles A/C systems in electric compressors with POE. It allows to quickly and accurately locate refrigerant gas leaks.

How does it work?

RED BRILLIANT has to be introduced in the vehicles A/C system, at the leak point the product will get out and stand out when lit by a UV lamp.

Benefits:

✓ It precisely locates refrigerant gas leaks. ✓ Solventfree. ✓ It complies with SAE J2297 & SAE J2298. ✓ It does not clog A/C system or recovery units. ✓ Visible to any UV lamp. ✓ It includes advice stickers.







06 Cartridges of 7,5 mL in Clamshell packaging

ArtNr.	Description	€	8	***
TR1098.A6.01	No Adapters	-	20	1120
TR1098.A6.H1	R134a Adapter	-	20	1120
TR1098.A6.H7	R1234yf Adapter	-	20	1120
TR1098.A6.H2	R134a + R1234yf Adapt.	-	20	1120

12 Cartridges of 7,5 mL in Clamshell packaging

-				
ArtNr.	Description	€	¥	***
TR1098.A12.01	No Adapters	-	12	672
TR1098.A12.H1	R134a Adapter	-	12	672
TR1098.A12.H7	R1234yf Adapter	-	12	672
TR1098.A12.H2	R134a + R1234yf Adapt.	-	12	672

06 Cartridges of 7,5 mL in Plastic Bag

ArtNr.	Description	€	8	***
TR1098.A6.01.P1	No Adapters	-	25	1400
TR1098.A6.H1.P1	R134a Adapter	-	25	1400
TR1098.A6.H7.P1	R1234yf Adapter	-	25	1400
TR1098.A6.H2.P1	R134a + R1234yf Adapt.	-	25	1400

12 Cartridges of 7,5 mL in Plastic Bag

-				
ArtNr.	Description	€	8	***
TR1098.01.P1	No Adapters	-	25	1400
TR1098.H1.P1	R134a Adapter	-	25	1400
TR1098.H7.P1	R1234yf Adapter	-	25	1400
TR1098.H2.P1	R134a + R1234yf Adapt.	-	25	1400

Self-Measuring Container

ArtNr.	Description	€	8	***
TR1098.K.S1	1 Litre	-	06	504
TR1098.O.S1	350 mL	-	12	1536
TR1098.Q.S1	250 mL	-	12	1920
TR1098.F.S1	100 mL	-	12	-

Leak Finder

Universal Refrigerant Leak Detection Kit

LEAK FINDER is a universal kit for both AUTOMOTIVE and HVAC&R market that contains everything needed to introduce the leak detector dye, locate the leak and clean the contaminated surface.

Kit includes:

250 mL self-measuring container of Brilliant or Green Brilliant. Stickers. Brilliant Remover 100 mL spray bottle. 50 mL Refillable Syringe Injector. Low-pressure port adapter for systems with R134a. 120 mm 1/4 SAE adapter with one-way valve. 120 mm 5/16 SAE adapter (R410a) with oneway valve. 9 UV LED leak detector lamp. Goggles with 100% UV protection.



Fast Leak Finder

02.

01.

Universal Refrigerant Leak Detection Kit

FAST LEAK FINDER is a universal kit for both AUTOMOTIVE and HVAC&R market that contains everything needed to introduce the leak detector dye, locate the leak and clean the contaminated surface.

Kit includes:

12 doses of 7.5 mL of Brilliant or Green Brilliant. Stickers. Brilliant Remover 400 mL spray bottle. Low-pressure port adapter for systems with R134a. 120 mm 1/4 SAE adapter with one-way valve. 120 mm 5/16 SAE adapter (R410a) with one-way valve. 9 UV LED leak detector lamp. Goggles with 100% UV protection.



Fast Leak Finder 2

03.

Universal Refrigerant Leak Detection Kit

FAST LEAK FINDER KIT 2 is a universal kit for AUTOMOTIVE that contains everything needed to introduce the leak detector dye, locate the leak and clean the contaminated surface.

Kit includes:

16 doses of 7.5 mL of Brilliant or Green Brilliant. Stickers. Brilliant Remover 400 mL aerosol can. Low-pressure port adapter for systems with R134a. 5 UV LED leak detector lamp. Goggle with 100% UV protection.



Fast Leak Finder 3

04.

05.

Universal Refrigerant Leak Detection Kit

FAST LEAK FINDER KIT 3 is a universal kit for both AUTOMOTIVE and HVAC&R market that contains everything needed to introduce the leak detector dye, locate the leak and clean the contaminated surface.

Kit includes:

250 mL self-measuring container of Brilliant or Green Brilliant. Stickers. Brilliant Remover 100 mL spray bottle. 50 mL refillable syringe injector. Lowpressure port adapter for systems with R134a. 120 mm 1/4 SAE adapter with one-way valve. 120 mm 5/16 SAE adapter (R410a) with one-way valve. 1 UV LED-3W leak detector lamp. Goggles with 100% UV protection.



	2 ocomption	•	~	-
RK1355	Brilliant - (Yellow)	-	01	-
RK1372	Green Brilliant - (Green)	-	01	-



Refrigerant Leak Detection Kit

BRILLIANT SET is a universal kit for AUTOMOTIVE market that contains everything needed to introduce the leak detector dye, locate the leak.

Clamshell contains:

06.

Brilliant Remov

DEFFE

Brilliant or Green Brilliant 250/350 mL selfmeasuring container. Stickers. 50 mL refillable syringe injector. Low-pressure port adapter for systems with R134a. 9 UV LED leak detector lamp. Goggles with 100% UV protection.



ArtNr.	Description	€	8	*
RK1235.01	Brilliant - 250 mL (Yellow)	-	8,00	-
RK1340.01	Green Brilliant - 250 mL (Green)	-	8,00	-
RK1237.01	Brilliant - 350 mL (Yellow)	-	8,00	-
RK1341.01	Green Brilliant - 350 mL (Green)	-	8,00	-

Brilliant Remover

Fluorescent UV Dyes Remover

BRILLIANT REMOVER is a cleaner to remove any trace of leak detector dye.

How does it work?

BRILLIANT REMOVER must be directly sprayed on the residues of leak detector dye; thanks to its special formulation, it removes any trace.

Benefits:

 It avoids any subsequent false localization of leaks.

ArtNr.	Description	€	P	***
TR1109.01	100 mL Spray Bottle	-	32	2496
TR1108.K.01	1 Litre Spray Bottle	-	06	570
TR1004.01	400 mL Aerosol Can	-	12	1344



Electronic Leak Detector

ELECTRONIC LEAK DETECTOR is an electronic device specifically designed to detect the gas mixture of Hydrogen H₂ (5%) / Nitrogen N₂ (95%) and all refrigerant gases R134a - R410a - R407c - R1234yf - R32 R404a - R502 - R600 - R290. The leak detector is equipped with a heating sensor and a microprocessor which guarantee a very precise and accurate signal. Thanks to the presence of an intensity regulator and 7 LED indicators, having a coloured visual scale function, the device guarantees the detection of the leakages less than sppm (2g/year).

Technical Features:

✓ Semiconductor heated sensor. ✓ 40 cm stainless flexible probe. ✓ Operating temperatures from 0 to 40°C. ✓ 3 sensitivity levels. ✓ Leak detection indicator with 7 LED tricoloured visual scale. ✓ Detectable refrigerant gases: R134a-R1234yf-R410a-R404a-R407c-R32-R502-R600-R290. ✓ Meeting SAE J1627 CE regulations. ✓ Power source: 2 x C alkaline batteries. ✓ Power supply 3.3 V/0.5 A. ✓ Plastic case for storage and transport (22.2 x 6.6 x 5.1 cm). ✓ Weight: 418 g (battery included).



ArtNr.	€	8	
RK1335	-	01	-
AS1014.01	-	01	-
AS1015.01	-	01	-

$\square N_2H_2$ Detection Kit

08.

07.

 $\rm N_2H_2$ DETECTION KIT is a special kit to test the presence of leakages up to 5ppm (2g/year) by the use of a specific electronic leak detector in A/C systems under pressure with a Nitrogen/Hydrogen mixture ($\rm N_2H_2$). The Electronic Leak Detector recognises also the refrigerant gases R134a - R410a - R407c - R1234yf - R32 - R404 - R502 - R600 - R290.

The Kit includes:

- Gas pressure reducer (0-60 Bar) (EN ISO 2503 186588).
- 2m connection hose with final ball valve and ¼ SAE swivel connection, (SAE J2196 and SAE J2888).
- 25 cm hose with ball valve and sectors manifold gauge (1.0 class) with refrigerant gas scales R134a / R1234yf / R32 / R410a / R404a / R407c / R422 / R507 / R22 and Nitrogen/Hydrogen gases mixture (N₂H₂).
- Low pressure side quick coupler for vehicle A/C systems with refrigerant gas R134a.
- High pressure side quick coupler for vehicle A/C systems with refrigerant gas R1234yf.
- One shot cartridge N_2/H_2 by 950cc-110 Bar.
- Adaptor for one shot cartridge (M10x1 W21,80 RHE).
- Electronic leak detector.
- Plastic case for storage and transport (44.7 \times 41.2 \times 10.7 cm).

Technical Features:

✓ Semiconductor heated sensor. ✓ 40 cm stainless flexible probe. ✓ Operating temperatures from 0 to 40°C. ✓ 3 sensitivity levels. ✓ Leak detection indicator with 7 LED tricoloured visual scale. ✓ Detectable refrigerant gases: R134a - R1234yf - R410a - R404a - R407c - R32 - R502 - R600 - R290. ✓ It fulfills the requirement according to SAE J1627 CE regulations. ✓ Power source: 2 x C alkaline batteries. ✓ Power Supply 3.3 V/0.5 A.



ArtNr.	Description	€	¥
RK1337	W21,7 x 1" ¼ - UNI 4409 (IT)	-	-
RK1337.UK	G5/8" - BS 341 (UK)		-
RK1337.DE	W24,32 x 1" 1/4 - DIN 477 (DE)		-
RK1337.FR	Ø21,7 x 1,814 - NFE 29-650/C (FR)		-

RK1267

Flexible Bright Torch

FLEXIBLE BRIGHT TORCH is a 5 LED UV lamp with two heads and flexible probe to locate refrigerant gas leaks even in the most difficult positions to light up.

How does it work?

Screw the UV head on the body of the lamp, directly on it or through the probe, inspect all the A/C system components. In presence of detector liquid, it will stand out as fluorescent, localizing the leakage.

Technical Features:

✓ Power supply: 3 batteries "AA" of 1.5 V. ✓ 100% UV protection goggles included. ✓ LED wavelenght: 385-380 nm. ✓ 5 white LED head. ✓ Aluminium body. ✓ Clamshell.

High Bright Torch

HIGH BRIGHT TORCH is a 1 LED UV - 3W UV lamp to locate refrigerant gas leaks.

How does it works?

Inspect all A/C systems components; in presence of detector liquid, it will stand out as fluorescent, localizing the leakage.

Technical Features:

✓ Power supply: 3 batteries "C" of 1.5 V. ✓ 100% UV protection goggles included. ✓ LED wavelenght: 410-405 nm. ✓ Aluminium body. ✓ Clamshell.

Adjustable Focus Bright Torch

ADJUSTABLE FOCUS BRIGHT TORCH is a 1 Led UV - 3W UV lamp to locate refrigerant gas leaks.

How does it work?

Inspect all A/C systems components. In presence of detector liquid, it will stand out as fluorescent, localizing the leakage.

Technical Features:

✓ Power supply: 2 batteries "C" of 1.5 V. ✓ 100% UV protection goggles included ✓ LED wavelenght: 410-405 nm. ✓ Aluminium body. ✓ Plastic case.

Mini Bright Torch

MINI BRIGHT TORCH is a 9 led UV lamp to locate refrigerant gas leaks.

How does it work?

Inspect all A/C systems components.In presence of detector liquid, it will stand out as fluorescent, localizing the leakage.

Technical Features:

✓ Power supply: 3 battery "AAA" of 1.5 V. ✓ 100% UV protection goggles included. ✓ LED wavelenght: 410-405 nm. ✓ Aluminium body. ✓ Clamshell.

Wire Bright Torch

WIRE BRIGHT TORCH is a 100W – 12V UV lamp to locate refrigerant gas leaks.

How does it work?

Inspect all A/C systems components. In presence of detector liquid, it will stand out as fluorescent, localizing the leakage.

Technical Features:

✓ Power supply: 12 V. ✓ 100% UV protection goggles included. ✓ LED wavelength: 410 - 405 nm. ✓ Plastic body.





05










£

Art.-Nr.

RK1230





3

14

25

10.

12

13

Bright Magnifier

BRIGHT MAGNIFIER is a lamp composed of 5 white LED and 1 UV LED to locate Refrigerant Gas Leaks.

How does it work?

14.

15.

16.

17.

18.

Inspect all A/C systems components. In presence of detector liquid, it will stand out as fluorescent, localizing the leakage. Thanks to the magnifying lens, it allows to locate even the littlest leakages.

Technical Features:

✓ Power supply: 2 batteries "AA" of 1.5 V. ✓ 100% UV protection goggles included. ✓ LED wavelength: 385-380 nm. ✓ Plastic body. ✓ Plastic case.

Safety UV Goggles

The Safety UV Goggles are goggles to protect the eyes from UV rays.

How do they work?

When using any UV lamp, we recommend wearing these goggles to locate leaks: thanks to their yellow color they will make the fluorescence of the leak detector dye more visible.

Technical Features:

It complies with EN166:2001. It complies with EN170:2002.

Dye and Oil Refillable Syringe Injector

Refillable 20 & 50 mL injector. Adapter with R134a low side port quick coupler. Burst pressure of the hose: 60 Bar. Plastic case.

ArtNr.	Description	€	¥
IN1021.01	20 mL	-	01
IN1022.01	50 mL for R134a	-	01
RK1357	50 mL for R1234yf	-	01







เป็นเป็นเป็นเป็นเป็

Calibrated Screw Injector

Refillable 60 mL volume injector. 1/4 SAE swivel connection. R134a low pressure port quick coupler. Plastic case.



Refillable Injector 7,5 mL

Refillable injector with 2 ball valves. Rear connection: 1/4 SAE Male. Front connection: 3/8 SAE Female. 3/8 SAE Male - 1/4 SAE Female adapter.

ArtNr.	€	8
RK1106	-	01



Refillable 60 mL volume injector. Ball valve 1/4 SAE swivel connection. 1/4 SAE Male rear connection.

19. Male Rk1

Art.-Nr. € ❤ RK1523 01





PLASTIC ADAPTERS

ArtNr.	Description	€	8
TB5166.01	Flex Hose (A)	-	50
RA1064.01	R134a Adapter (B)	-	01
RA1068.01	R1234yf Adapter (C)	-	01
RK1422	R134a + Flex Hose (A+B) Adapters	-	30
RK1423	R1234yf + Flex Hose (A+C) Adapters	-	30
RK1424	R134a + R1234yf + Flex Hose (A+B+C) Adapters	-	30







FLEXIBLE PLASTIC ADAPTERS "PLASTIC FLEX"

ArtNr.	Description	€	8
TB5161.01	R134a Adapter (D)	-	20
TB5152.01	R1234yf Adapter (E)	-	20
RK1441	R134a + R1234yf (D+E) Adapters	-	20



FLEXIBLE ADAPTERS WITH METAL VALVE "PRO-FLEX"

ArtNr.	Description	€	8
TB5162.01	R134a Adapter (F)	-	20
TB5163.01	R1234yf Adapter (G)	-	20
RK1442	R134a + R1234yf (F+G) Adapters	-	20



FLEXIBLE ADAPTERS WITH METAL VALVE AND QUICK COUPLER











Premium PAG 46

PAG Lubricant for Vehicle A/C System

Lubricante PAG para Sistemãs de ArA vencunos PAG Schmiermitel für KFZ klimanalige veloculos Lubrifiant PAG pour Systemaz de Vehecules Lubrifiant PAG pour Systemaz de Vehecules Cheasa PAG Ann de Conservationes Diel PAG de Urabelimatizate Olej PAG de Urabelimatizate Nacio Olej Ang de Urabelimatizate Ulej PAG pentru Sistemele ACR ale Autovehiculsior Aobi PAG yea Suramyra AC Oqujarov PAG Olej Ara Cosytem Fordon PAG Olej Ara Cosytem Fordon PAG Olej Ara Cosytem Fordon PAG Olej for Ara Cosytem Auton limastointijärjestelmän Votleulane PAG PAG mazivo pre System Kilmatizate

1Le (34 floz)

LUBRICANTS FOR VEHICLE A/C SYSTEMS

PAG Lubricants for Vehicles A/C Systems with R134a - R1234yf

PREMIUM PAG

PREMIUM PAG 100

		•		**	
ArtNr.	Litres	€	8		Packaging
OL6057.Q.P2	0,25	-	24	2880	
OL6057.M.P2	0,50	-	12	1080	
OL6057.K.P2	1	-	12	756	Plastic Tank
OL6057.UP.P2	3,78		02	-	FIASLIC TATIK
OL6057.I.P2	4	-	02	-	
OL6057.P.P2	5	-	02	140	
OL6057.Q.01	0,25	-	-		
OL6057.K.01	1	-	12	-	
OL6057.P.01	5	-	02	-	Metal Tank
OL6057.T	25	-	01	24	
OL6057.B	200	-	01	02	
OL6057.IBC	1000	-	01	-	IBC Cube

	ArtNr.	Litres	€	F	***	Packaging
Щ	OL6058.Q.P2	0,25	-	24	2880	
2	OL6058.M.P2	0,50	-	12	1080	
UV DYE	OL6058.K.P2	1	-	12	756	Plastic Tank
Ď	OL6058.UP.P2	3,78	-	02	-	FIASLIC TALIK
+	OL6058.I.P2	4	-	02	-	
PAG	OL6058.P.P2	5	-	02	140	
	OL6058.Q.01	0,25	-	-		
Σ	OL6058.K.01	1	-	12	-	
Ĕ	OL6058.P.01	5	-	02	-	Metal Tank
PREMIUM	OL6058.T	25	-	01	24	
	OL6058.B	200	-	01	02	
	OL6058.IBC	1000	-	01	-	IBC Cube

€

-

-

-

-

-

-

-

-

-

_

_

-

\$ 🔶

24 2880

12 1080

12

02

02

-

12 -

02 -

01 24

01 02

01

756

-

-

140 02

-

Packaging

Plastic Tank

Metal Tank

IBC Cube

	ArtNr.	Litres	€	8	***	Packaging		ArtNr.	Litres
	OL6001.Q.P2	0,25	-	24	2880			OL6006.Q.P2	0,25
	OL6001.M.P2	0,50	-	12	1080			OL6006.M.P2	0,50
46	OL6001.K.P2	1	-	12	756	Plastic Tank	46	OL6006.K.P2	1
G	OL6001.UP.P2	3,78		02	-	FIASLIC TATIK	<u>ن</u>	OL6006.UP.P2	3,78
PA	OL6001.I.P2	4	-	02	-		₹₽	OL6006.I.P2	4
	OL6001.P.P2	5	-	02	140			OL6006.P.P2	5
MIUM	OL6001.Q.01	0,25	-	-			23	OL6006.Q.01	0,25
Σ	OL6001.K.01	1	-	12	-		Ξ+	OL6006.K.01	1
ШШ	OL6001.P.01	5	-	02	-	Metal Tank	PRE	OL6006.P.01	5
Р.	OL6001.T	25	-	01	24		Б	OL6006.T	25
	OL6001.B	200	-	01	02			OL6006.B	200
	OL6001.IBC	1000	-	01	-	IBC Cube		OL6006.IBC	1000

ArtNr. Litres € ♥ Packaging OL6003.Q.P2 0,25 - 24 2880 OL6003.M.P2 0,50 - 12 1080 OL6003.K.P2 1 - 12 756 OL6003.UP.P2 3,78 02 - OL6003.I.P2 4 - 02 - OL6003.P.P2 5 - 02 140
OL6003.M.P2 0,50 - 12 1080 OL6003.K.P2 1 - 12 756 OL6003.UP.P2 3,78 02 - OL6003.I.P2 4 - 02 -
OL6003.K.P2 1 - 12 756 Plastic Tank OL6003.UP.P2 3,78 02 - Plastic Tank 0 - 0 - 0 - <
OL6003.UP.P2 3,78 02 - OL6003.I.P2 4 - 02 -
OL6003.UP.P2 3,78 02 - OL6003.I.P2 4 - 02 -
OL6003.P.P2 5 - 02 140
OL6003.Q.01 0,25
OL6003.K.01 1 - 12 -
OL6003.P.01 5 - 02 - Metal Tank
OL6003.T 25 - 01 24
OL6003.B 200 - 01 02
OL6003.IBC 1000 - 01 - IBC Cube

	ArtNr.	Litres	€	8	***	Packaging
	OL6008.Q.P2	0,25	-	24	2880	
_	OL6008.M.P2	0,50	-	12	1080	
100	OL6008.K.P2	1	-	12	756	Plastic Tank
	OL6008.UP.P2	3,78	-	02	-	Plaslic Tarik
DYE DYE	OL6008.I.P2	4	-	02	-	
	OL6008.P.P2	5	-	02	140	
	OL6008.Q.01	0,25	-	-		
≣ +	OL6008.K.01	1	-	12	-	
Ξ	OL6008.P.01	5	-	02	-	Metal Tank
PREM +	OL6008.T	25	-	01	24	
_	OL6008.B	200	-	01	02	
	OL6008.IBC	1000	-	01	-	IBC Cube

	ArtNr.	Litres	€	8	***	Packaging
	OL6004.Q.P2	0,25	-	24	2880	
10	OL6004.M.P2	0,50	-	12	1080	
125	OL6004.K.P2	1	-	12	756	Plastic Tank
	OL6004.UP.P2	3,78		02	-	FIASLIC TALIK
Ă	OL6004.I.P2	4	-	02	-	
	OL6004.P.P2	5	-	02	140	
PREMIUM PAG	OL6004.Q.01	0,25	-	-		
Ξ	OL6004.K.01	1	-	12	-	
Ш	OL6004.P.01	5	-	02	-	Metal Tank
Н	OL6004.T	25	-	01	24	
	OL6004.B	200	-	01	02	
	OL6004.IBC	1000	-	01	-	IBC Cube

	ArtNr.	Litres	€	8	***	Packaging
	OL6045.Q.P2	0,25	-	24	2880	
0	OL6045.M.P2	0,50	-	12	1080	
125	OL6045.K.P2	1	-	12	756	Plastic Tank
	OL6045.UP.P2	3,78	-	02	-	Plastic Tarik
PAG	OL6045.I.P2	4	-	02	-	
	OL6045.P.P2	5	-	02	140	
PREMIUM + UV	OL6045.Q.01	0,25	-	-		
≣+	OL6045.K.01	1	-	12	-	
Ш.	OL6045.P.01	5	-	02	-	Metal Tank
ВЧ	OL6045.T	25	-	01	24	
	OL6045.B	200	-	01	02	
	OL6045.IBC	1000	-	01	-	IBC Cube

*FOR FURTHER DETAILS ASK FOR THE LUBRICANTS CATALOGUE

PAG Lubricants for Vehicles A/C System with R134a - R1234yf

	ArtNr.	Litres	€	8	***	Packaging	
	OL6005.Q.P2	0,25	-	24	2880		
0	OL6005.M.P2	0,50	-	12	1080		0
15(OL6005.K.P2	1	-	12	756	Plastic Tank	150
(5	OL6005.UP.P2	3,78		02	-	Plastic Tarik	15
Ă	OL6005.I.P2	4	-	02	-		A A
L P	OL6005.P.P2	5	-	02	140		
PREMIUM PAG 150	OL6005.Q.01	0,25	-	-			PREMIUM
Σ	OL6005.K.01	1	-	12	-		N N
Ĩ	OL6005.P.01	5	-	02	-	Metal Tank	Ĩ
ЦЦ	OL6005.T	25	-	01	24		Н
	OL6005.B	200	-	01	02		
	OL6005.IBC	1000	-	01	-	IBC Cube	

	ArtNr.	Litres	€	8	***	Packaging
	OL6010.Q.P2	0,25	-	24	2880	
0	OL6010.M.P2	0,50	-	12	1080	
150	OL6010.K.P2	1	-	12	756	Plastic Tank
	OL6010.UP.P2	3,78	-	02	-	Plastic Tarik
PAG	OL6010.I.P2	4	-	02	-	
E O	OL6010.P.P2	5	-	02	140	
53	OL6010.Q.01	0,25	-	-		
≣+	OL6010.K.01	1	-	12	-	
PREMIUM + UV I	OL6010.P.01	5	-	02	-	Metal Tank
	OL6010.T	25	-	01	24	
	OL6010.B	200	-	01	02	
	OL6010.IBC	1000	-	01	-	IBC Cube

PAG Lubricants for Vehicles A/C System with R1234yf

	ArtNr.	Litres	€	8		Packaging		ArtNr.
G	OL6059.Q.P2	0,25	-	24	2880		G	OL6060.Q.P2
PA	OL6059.M.P2	0,50	-	12	1080		PA	OL6060.M.P2
	OL6059.K.P2	1	-	12	756	Plastic Tank	_	OL6060.K.P2
A S	OL6059.UP.P2	3,78	-	02	-	FIASLIC TATIK	A	OL6060.UP.P2
Ř	OL6059.I.P2	4	-	02	-		КЩ К	OL6060.I.P2
Щ.	OL6059.P.P2	5	-	02	140		ЩÓ	OL6060.P.P2
UNIVERSAL	OL6059.Q.01	0,25	-	-			ΞS	OL6060.Q.01
	OL6059.K.01	1	-	12	-		\supset_+	OL6060.K.01
Ý	OL6059.P.01	5	-	02	-	Metal Tank	34yf	OL6060.P.01
34	OL6059.T	25	-	01	24		34	OL6060.T
R1234yf	OL6059.B	200	-	01	02		12	OL6060.B
Ē	OL6059.IBC	1000	-	01	-	IBC Cube	œ	OL6060.IBC

	ArtNr.	Litres	€	8	**	Packaging
G	OL6060.Q.P2	0,25	-	24	2880	
PAG	OL6060.M.P2	0,50	-	12	1080	
/ERSAL DYE	OL6060.K.P2	1	-	12	756	Plastic Tank
	OL6060.UP.P2	3,78	-	02	-	FIASLIC TALIK
	OL6060.I.P2	4	-	02	-	
Щ́О.	OL6060.P.P2	5	-	02	140	
	OL6060.Q.01	0,25	-	-		
	OL6060.K.01	1	-	12	-	
R1234yf	OL6060.P.01	5	-	02	-	Metal Tank
	OL6060.T	25	-	01	24	
	OL6060.B	200	-	01	02	
Œ	OL6060.IBC	1000	-	01	-	IBC Cube

	ArtNr.	Litres	€	8	***	Packaging	
	OL6047.Q.P2	0,25	-	24	2880		
9	OL6047.M.P2	0,50	-	12	1080		
	OL6047.K.P2	1	-	12	756	Plastic Tank	
4	OL6047.UP.P2	3,78	-	02	-		
PAG 46	OL6047.I.P2	4	-	02	-		
	OL6047.P.P2	5	-	02	140		
R1234yf	OL6047.Q.01	0,25	-	-			
5 S	OL6047.K.01	1	-	12	-		
312	OL6047.P.01	5	-	02	-	Metal Tank	
	OL6047.T	25	-	01	24		
	OL6047.B	200	-	01	02		
	OL6047.IBC	1000	-	01	-	IBC Cube	

	ArtNr.	Litres	€	8	***	Packaging
	OL6048.Q.P2	0,25	-	24	2880	
yf PAG 100	OL6048.M.P2	0,50	-	12	1080	
	OL6048.K.P2	1	-	12	756	Plastic Tank
	OL6048.UP.P2	3,78	-	02	-	Plastic Tarik
	OL6048.I.P2	4	-	02	-	
	OL6048.P.P2	5	-	02	140	
	OL6048.Q.01	0,25	-	-		
34	OL6048.K.01	1	-	12	-	
R1234yf	OL6048.P.01	5	-	02	-	Metal Tank
	OL6048.T	25	-	01	24	
	OL6048.B	200	-	01	02	
	OL6048.IBC	1000	-	01	-	IBC Cube

POE Lubricants for Vehicles A/C System with R134a - R1234yf

	ArtNr.	Litres	€	8	***	Packaging	
POE 100E	OL6033.Q.P2	0,25	-	24	2880		
	OL6033.M.P2	0,50	-	12	1080		
	OL6033.K.P2	1	-	12	756	Plastic Tank	
	OL6033.UP.P2	3,78	-	02	-		
	OL6033.I.P2	4	-	02	-		
	OL6033.P.P2	5	-	02	140		
	OL6033.Q.01	0,25	-	-			
Б	OL6033.K.01	1	-	12	-		
	OL6033.P.01	5	-	02	-	Metal Tank	
	OL6033.T	25	-	01	24		
	OL6033.B	200	-	01	02		
	OL6033.IBC	1000	-	01	-	IBC Cube	

	ArtNr.	Litres	€	8	***	Packaging
	OL6034.Q.P2	0,25	-	24	2880	
ш	OL6034.M.P2	0,50	-	12	1080	
	OL6034.K.P2	1	-	12	756	Disatia Taala
-	OL6034.UP.P2	3,78	-	02	-	Plastic Tank
5	OL6034.I.P2	4	-	02	-	
+	OL6034.P.P2	5	-	02	140	
	OL6034.Q.01	0,25	-	-		
2	OL6034.K.01	1	-	12	-	
	OL6034.P.01	5	-	02	-	Metal Tank
РОн	OL6034.T	25	-	01	24	
	OL6034.B	200	-	01	02	
	OL6034.IBC	1000	-	01	-	IBC Cube

PAG Lubricants for Vehicles A/C System with CO₂

G	ArtNr.	Litres	€	8	***	Packaging
46	OL6075.Q.P2	0,25	-	24	2880	
0	OL6075.M.P2	0,50	-	12	1080	Plastic Tank
<u>N</u>	OL6075.K.P2	1	-	12	756	

œ	ArtNr.	Litres	€	F	***	Packaging	
68	OL6076.Q.P2	0,25	-	24	2880		
ISO	OL6076.M.P2	0,50	-	12	1080	Plastic Tank	
<u>0</u>	OL6076.K.P2	1	-	12	756		
()							




Vacuum Pumps Mineral Oil

Errecom Vacuum Pump Oils are developed on a high viscosity index oil formulated from selected paraffinic base oils. These oils are designed with additives that achieve better lubricity, chemical and thermal stability as well as excellent anti-wea protection of the AC/R system components. Vacuum Pump Lubricants are new conception lubricants: thanks to their chemical-physical characteristics, they have been developed for modern hydraulic systems also operating in severe operating conditions.

The pursued aims in the development of new Errecom lubricants are:

- ✓ Excellent lubricity;
- ✓ High viscosity index;
- ✓ Low pour point: this feature allows you to expand the temperature range of the product usage and ensures easy starting of the hydraulic systems in cold condition;
- ✓ High anti-wear properties to increase the efficiency and the life of the pumps and of all the system moving "organs";
- High Compatibility with the materials of all kind of systems, both new and old ones (with a constant attention to their evolution over the time);
- High thermal stability which allows the usage also in closed systems operating at high temperatures and high pressures without causing the formation of deposits and sludge;
- High oxidative stability that allows extensions of the charge while operating. This avoids the possibility of early viscousing processes of the product;
- High hydrolytic stability capable of saving the working oil from decomposition processes even when in presence of small percentages of water;
- ✓ Good demulsibility: this property promotes rapid separation of oil from water which has possibly entered the system. Demulsibility can further inhibit the oxidation process;
- ✓ Higher filterability in comparison with the previous generation lubricants, even in presence of water: this prevents the clogging of filters and extends the normal filters replacement intervals;
- Anti-corrosion and anti-rust power to effectively protect all the metal components of the hydraulic system;
- ✓ Anti-foam properties to avoid the presence of foam and air. These are factors that can reduce the system efficiency because of the coefficient of cubic compressibility which is different from the one of the oil.

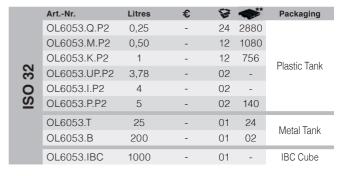

	ArtNr.	Litres	€	8	***	Packaging	
	OL6054.Q.P2	0,25	-	24	2880		
	OL6054.M.P2	0,50	-	12	1080		
	OL6054.K.P2	1	-	12	756	Plastic Tank	
46	OL6054.UP.P2	3,78	-	02	-	FIASUC TALIK	
ISO	OL6054.I.P2	4	-	02	-		
	OL6054.P.P2	5	-	02	140		
	OL6054.T	25	-	01	24	Metal Tank	
	OL6054.B	200	-	01	02		
	OL6054.IBC	1000	-	01	-	IBC Cube	

	ArtNr.	Litres	€	P	**	Packaging	
ISO 68	OL1008.Q.P2	0,25	-	24	2880		
	OL1008.M.P2	0,50	-	12	1080		
	OL1008.K.P2	1	-	12	756	Plastic Tank	
	OL1008.UP.P2	3,78	-	02	-	FIASLIC TATIK	
	OL1008.I.P2	4	-	02	-		
	OL1008.P.P2	5	-	02	140		
	OL1008.T	25	-	01	24	Metal Tank	
	OL1008.B	200	-	01	02		
	OL1008.IBC	1000	-	01	-	IBC Cube	

💾 High Viscosity Index

	ArtNr.	Litres	€	8	***	Packaging	
ISO 46	OL1010.Q.P2	0,25	-	24	2880		
	OL1010.M.P2	0,50	-	12	1080		
	OL1010.K.P2	1	-	12	756	Plastic Tank	
	OL1010.UP.P2	3,78	-	02	-	FIASUC TANK	
	OL1010.I.P2	4	-	02	-		
	OL1010.P.P2	5	-	02	140		
	OL1010.T	25	-	01	24	Metal Tank	
	OL1010.B	200	-	01	02		
	OL1010.IBC	1000	-	01	-	IBC Cube	



$\square \mathsf{POE} \leftrightarrow \mathsf{PAG} \mathsf{Id}$

01.

Test to identify the type of A/C Lubricant (either POE or PAG)

POE↔PAG ID is an essential test to identify the type of synthetic lubricant used in the refrigeration and air conditioning system to be treated. If you are working with a lubricant whose type and origin are unknown, the use of POE↔PAG ID is highly recommended: this test guarantees the identification of the oil category in usage (either POE or PAG) in a quick and effective way.

How does it work?

Once it comes in touch with the lubricant, POE↔PAG ID contains chemical elements that react by changing the aspect of the solution. The result will indicate if it is POE or PAG. Once a sample of lubricant is taken and poured into one of the available tests, the solution will quickly change its appearance: if the used oil is a PAG, the mixture will be clear. With POE oil the mixture will instead take on a cloudy appearance.

POEIPAG Id



Benefits: ✓ It works with all kind of POE and PAG lubricants. ✓ The result will be visible in a few seconds. ✓ Easy to use. ✓ The box contains 4 TESTS.





ArtNr.	€	8	***
RK1411.S1	-	12	2160

Oil Guard

02.

By-Pass for System Diagnosis

OIL GUARD is a diagnostic device to verify the general condition of a vehicles A/C system, simply by connecting to the high and low-pressure ports of the A/C System. Through the OIL GUARD glass it is possible to visually inspect the presence of chemical additives such as UV leak detector dye or A/C leak stop, as well as the oil/refrigerant gas miscibility. It is therefore possible to evaluate the quality of the oil, and the possible presence of water or other contaminants.

The kit includes:

✓ 1 red refrigerant charging hose. ✓ 1 blue refrigerant charging hose. ✓ 1 low-pressure port quick coupler. ✓ 1 high-pressure port quick coupler.

ArtNr.	Description	€	8	* **
RK1268	Oil Guard R134a	-	01	-
RK1025	Oil Guard R1234yf	-	01	-



Special Bag System

03.

SPECIAL BAG SYSTEM is a packaging system specifically made to prevent that the chemical additives used in A/C systems come into contact with the humidity in the air.

Fluorescent UV leak detector dyes and lubricants are packed in moisture-free laminated bags.

How does it work?

It's enough to change the connectors of plastic bottles additives of each A/C recovery unit with ${\sf Errecom's}$ special plastic connectors.

Benefits:

- \checkmark No contamination with moisture.
- \checkmark No contamination with external particles.
- \checkmark Easy and fast tanks filling.
- ✓ No extra costs the same cost of standard packaging.
 ✓ Easy to use.
- ✓ It is possible to install on every A/C Recovery Unit.
- ✓ It allows a fast, easy and clean service.
- It prevents and avoids moisture and other contaminants from entering A/C recovery unit.
- ✓ Safe and moisture-free storage.









Special Plastic Adapters with Quick Coupler

ArtNr.	Description	€	8	***
RP1038.01.W	White Straight Connection	-	01	-
RP1039.01.W	90° White Connection	-	01	-
RP1038.01.Y	Yellow Straight Connection	-	01	-
RP1039.01.Y	90° Yellow Connection	-	01	-

Rectangular Tank

Description	€	8	-
) mL Tank with Plastic Plug - Black (A)	-	01	
) mL Tank with Pastic Plug - Yellow (A)	-	01	
) mL Tank with 1/8" Thread - Black (B)	-	01	
) mL Tank with 1/8" Thread - Yellow (B)	-	01	
) mL Tank with Metal Plug - Black (C)	-	01	
) mL Tank with Metal Plug - Yellow (C)	-	01	
) mL Tank with Metal Quick Coupler - Black (D)	-	01	
) mL Tank with Metal Quick Coupler - Yellow (D)	-	01	
) mL Tank with Plastic Plug - Black (A)) mL Tank with Pastic Plug - Yellow (A)) mL Tank with 1/8" Thread - Black (B)) mL Tank with 1/8" Thread - Yellow (B)) mL Tank with Metal Plug - Black (C)) mL Tank with Metal Plug - Yellow (C)) mL Tank with Metal Quick Coupler - Black (D)	mL Tank with Plastic Plug - Black (A) - mL Tank with Pastic Plug - Yellow (A) - mL Tank with 1/8" Thread - Black (B) - mL Tank with 1/8" Thread - Yellow (B) - mL Tank with Metal Plug - Black (C) - mL Tank with Metal Plug - Yellow (C) - mL Tank with Metal Quick Coupler - Black (D) -	ML Tank with Plastic Plug - Black (A)01ML Tank with Pastic Plug - Yellow (A)01ML Tank with Pastic Plug - Yellow (A)01ML Tank with 1/8" Thread - Black (B)01ML Tank with 1/8" Thread - Yellow (B)01ML Tank with Metal Plug - Black (C)01ML Tank with Metal Plug - Yellow (C)01ML Tank with Metal Quick Coupler - Black (D)01

Cylindrical Tank

ArtNr.	Description	€	8	*
FLK001	250 mL Tank with Plastic Plug - Black (A)	-	01	-
FLK004	250 mL Tank with Pastic Plug - Yellow (A)	-	01	-
FLK077	250 mL Tank with 1/8" Thread - Black (B)	-	01	
FLK072	250 mL Tank with 1/8" Thread - Yellow (B)	-	01	
FLK025	250 mL Tank with Metal Plug - Black (C)	-	01	
FLK026	250 mL Tank with Metal Plug - Yellow (C)	-	01	
FLK027	250 mL Tank with Metal Quick Coupler - Black (D)	-	01	
FLK028	250 mL Tank with Metal Quick Coupler - Yellow (D)	-	01	





🗅 Brilliant

Fluorescent UV Leak Detector Dye for Vehicle A/C Systems with R12 - R134a - R1234yf & for Electric Compressors

ArtNr.	Description	€	8	***
TR1083.SH	150 mL Special Bag	-	25	1400
TR1083.S	500 mL Special Bag	-	10	560

🖵 Blue Brilliant

Fluorescent UV Leak Detector Dye for Vehicle A/C Systems with R1234yf & for Electric Compressors

ArtNr.	Description	€	P	***
TR1121.SH	150 mL Special Bag	-	25	1400
TR1121.S	500 mL Special Bag	-	10	560

Red Brilliant

Fluorescent UV Leak Detector Dye POE based for Electric Compressors

ArtNr.	Description	€	8	* **
TR1098.SH	150 mL Special Bag	-	25	1400
TR1098.S	500 mL Special Bag	-	10	560



Lubricants for Vehicles A/C Systems

25

1400

150 mL Lubricants

ArtNr.	Description	€	8	***
OL6057.SH	PREMIUM PAG	-	25	1400
OL6001.SH	PREMIUM PAG 46	-	25	1400
OL6003.SH	PREMIUM PAG 100	-	25	1400
OL6004.SH	PREMIUM PAG 125	-	25	1400
OL6005.SH	PREMIUM PAG 150	-	25	1400
OL6033.SH	POE 100E	-	25	1400
150 mL Lubric	cants + UV DYE			
150 mL Lubric ArtNr.	cants + UV DYE	€	8	*
		€ -	2 5	** 1400
ArtNr.	Description	•		
ArtNr. OL6058.SH	Description PREMIUM PAG	•	25	1400
ArtNr. OL6058.SH OL6006.SH	Description PREMIUM PAG PREMIUM PAG 46	•	25 25	1400 1400

500 mL Lubricants

OL6034.SH

ArtNr.	Description	€	8	* **
OL6057.S	PREMIUM PAG	-	10	560
OL6001.S	PREMIUM PAG 46	-	10	560
OL6003.S	PREMIUM PAG 100	-	10	560
OL6004.S	PREMIUM PAG 125	-	10	560
OL6005.S	PREMIUM PAG 150	-	10	560
OL6033.S	POE 100E	-	10	560

500 mL Lubricants + UV DYE

POE 100E

ArtNr.	Description	€	8	* **
OL6058.S	PREMIUM PAG	-	10	560
OL6006.S	PREMIUM PAG 46	-	10	560
OL6008.S	PREMIUM PAG 100	-	10	560
OL6045.S	PREMIUM PAG 125	-	10	560
OL6010.S	PREMIUM PAG 150	-	10	560
OL6034.S	POE 100E	-	10	560



Belnet Aerosol

BELNET AEROSOL is the most direct, safe and simple solution to flush small refrigeration lines and its components.

How does it work?

BELNET AEROSOL flushing fluid is pressurized with CO_2 in aerosol can. The product can be used directly in a safe and practical way, with a special flushing gun (Flush Gun) or directly with the special rubber cone.

Benefits:

01.

✓ Ready to use. ✓ High flushing pressure (8 Bar/116 psi).
 ✓ High pressure until empty. ✓ No need for additional equipment.

				!	
Belnet Aerosol	600 mL		· ·	× ×	
ArtNr.	Description	€	8	* **	
TR1009.U.M0	with Rubber Cone	-	12	1008	
TR1009.U.M1	with Thread	-	12	1008	
				and the second second	
Belnet Aerosol 750 mL					
ArtNr.	Description	€	¥	* **	
TR1009.YW.M0	with Rubber Cone	-	12	672	
TR1009.YW.M1	with Thread	-	12	672	
Belnet Aerosol	accessories				
ArtNr.	Description	€	8	* **	
RP1042.01 1	/4 SAE Adapter	-	01	-	
RP1046.01 F	-lush Gun	-	01	-	
RP10/18/01	Flush Gun with Hose and Ball Valve	-	01	-	



Belnet

02.

BELNET is a flushing liquid with high evaporation level specifically developed to be used in all A/C systems.

How does it work?

It has to be introduced inside the A/C systems through manual or pneumatic devices; once inserted into the A/C system it removes metal residues and exhausted oil.

Benefits:

✓ No residual. ✓ Fast and complete evaporation.
 ✓ Flammable.

*

 $\langle ! \rangle$

Available in:

- 1 Litre metal container (equal to 0.8 Kg);
- 5 Litres metal tank (equal to 4.0 Kg).



Super Belnet

03.

SUPER BELNET is a non-flammable flushing liquid with high evaporation level specifically developed

to be used in all A/C systems.

How does it work?

It has to be introduced inside the A/C systems through manual, pneumatic or electric devices; once inserted into the A/C system it removes metal residues and exhausted oil.

Benefits:

✓ No residual. ✓ Fast and complete evaporation.
 ✓ Non-Flammable.

Available in:

- 1 Litre Metal Container (equal to 1.6 Kg);
- 5 Litres Metal Tank (equal to 8.0 Kg).







04

Automatic Flushing Units Liquid

ALPHA FLUSH is a flushing liquid specifically developed to be used with all automatic flushing units.

How does it work?

It has to be introduced inside the tanks of flushing units; once inserted into the A/C system it removes metal residues and exhausted oil.

Benefits:

✓ Safe for components of flushing units. ✓ Any residues are compatible with all refrigerant gases.
 ✓ Non-flammable.✓ No ADR.



	ArtNr.	Description	€	8	
	TR1142.K.01	1 Litre Metal Container	-	12	480
>	TR1142.P.01	5 Litres Metal Tank	-	02	168
>	TR1142.P.01	5 Litres Metal Tank	-	02	1

Top Flush

Flushing Fluid Alternative to Decafluoropentane (equivalent to Vertrel XF Dupont)

TOP FLUSH is a washing liquid based on hydrocarbons with almost zero ozone destruction potential (ODP) and low global warming potential (GWP). TOP FLUSH has a low boiling point, low evaporation temperature, excellent solvent retention capacity, low surface tension, low viscosity, non-flammability, chemical and thermal stability, low toxicity.

Benefits:

 ✓ It also eliminates water residues trapped in slits and thinner blind holes. ✓ It degreases deeply.
 ✓ It removes particles and dust. ✓ It evaporates very quickly and completely, speeding up the drying processes. ✓ It is effective even after numerous boiling cycles. ✓ No ADR.



	ALL-NL	Description	÷	-	
	TR1184.K.01	1 Litre Metal Container	-	12	480
	TR1184.P.01	5 Litres Metal Tank	-	02	168
>	TR1184.T	25 Litres Metal Tank	-	01	24

!

! 🚷

05.

Easy Flush PRO

06.

Automatic Flushing Unit for A/C Systems with Electric Pump

EASY FLUSH PRO is a flushing unit for A/C systems with totally automatic electric pump. It allows to flush the circuit in a clockwise and anticlockwise direction. It is equipped with a printer.

后分配

SDIN

Flushin

Technical Features:

Power supply: 220 V AC - 50 Hz. Internal tank capacity: 20 litres. Pump flow rate: 6 l/min. Mechanical seal pump with EPDM gaskets. Connection for external Nitrogen tank. Automatic reversal flushing cycle. 3m flexible hoses with 1/4 SAE Ball Valve. Kit of adapters for connection to A/C systems. Weight: 45Kg. Dimensions: 480x580x100mm. Printer. 5-key keyboard. Liquid level control window. Maximum pressure of flushing with Nitrogen: 5 BAR.

2

01

Warning!

Use this flushing unit ONLY WITH Errecom's Alpha Flush Flushing Fluid.

Art.-Nr. VP1049.01

Easy Flush

07.

Flushing Unit for A/C Systems with **Electric Pump**

EASY FLUSH is a flushing unit for A/C systems with a manually controlled electric pump. It allows to flush the circuit in a clockwise and anticlockwise direction

Technical Features:

Power supply: 230/240 V - 50/60 Hz. 20 Litres internal storage tank. Pump capacity: 14l/min. Internal storage tank. Pump capacity: 14/imin. Maximum pump power: 0.75 Kw. Maximum pump pressure: 0.45 MPa. Mechanical seal pump with EPDM gaskets. Mechanical inlet filter. Fast Connection for external Nitrogen cartridge. Clear external controls for reversing flush cycle without disconnecting hoses. 3m flexible hoses with 1/4 CAE hell unknow Adapted bit for connecting to A/C SAE ball valves. Adapter kit for connecting to A/C systems. Interchangeable connections: 1/4 SAE -3/8 SAE- 1/2 SAE (2 pcs each). Weight: 20Kg. Integrated cart.

Warning!

Use this flushing unit ONLY WITH Errecom's Alpha Flush Flushing Fluid.

Art.-Nr. C VP1027.01 01

Flush Pump

OB. Electric Pump to Flush A/C Systems

FLUSH PUMP is a cost-effective flushing system for large air-conditioning systems.

Technical Features:

Power Supply: 230/240 V – 50/60 Hz. Pump capacity: 14 I/min. Maximum pump power: 0.75 Kw. Maximum pump pressure: 0.45 MPa. Mechanical seal pump with EPDM gaskets. 2.5m flexible hoses with female 1/4 SAE connections. Interchangeable connections: 1/4 SAE -3/8 SAE- 1/2 SAE (2 pcs each). Storage and travel case.





The kit Includes:

09.

10.

Tank with gun for A/C systems flushing. Adapters kit to connect to A/C systems.10 Litres tank for the recovery of contaminated liquid. Plastic container for storage and handling.





Fast Flush Kit

Universal Kit for Washing and Flushing

The kit includes:

Belnet Aerosol can with thread. Flush Gun with hose and ball valve. Nitrogen 950 cc one-shot cartridge. $0\div10$ Bar pressure mini regulator. 1/4 SAE swivel hose adapter. Quick Coupler LP R134a. 1/4 SAE M x 5/16 SAE F 90° adapter. Plastic case for transport.



Flushing Gun

Low-priced A/C flushing equipment. Volume: 0,75 Litres. Ball valve with 1/4" Female connection. Hose length: 60 cm. 0÷12 Bar Gauge. 10 Bar Safety Valve.

ArtNr.	€	8	* **
RP1027.01	-	01	-
MN1127.01	-	01	-





Flushing Adapters Kit

12.

They are universal adapters with 1/4 SAE male fitting that allow to connect to any A/C system component and to run internal flushing operations in complete each tr safety.





ArtNr.	Description	€	8	***
RK1332	Adapter Kit	-	01	-
RP1051.01	Special Cone Adapter	-	01	-

Nitrogen-Hydrogen / Nitrogen Cartridge

13.

Nitrogen-Hydrogen Cartridge:

It is a one-shot 950cc cartridge, charged at 110Bar pressure. It contains 5% hydrogen and 95% nitrogen.

ArtNr.	Description	€	8	***
BG1062.01	950cc Cartridge / 110Bar	-	12	-
BG1069.01	2,2L Cartridge / 110Bar	-	12	-

Nitrogen Cartridge:

It is a one-shot cartridge of 950cc, charged at 110 Bar pressure. It contains 100% nitrogen.

ArtNr.	Description	€	8	* **
BG1005.01	950cc Cartridge / 110Bar	-	12	-



Mini Cartridge Adapter:

ArtNr.	Description	€	8	***
RP1029.01	Mini Cartridge Adapter (IT)	-	01	-
RP1059.01	Mini Cartridge Adapter (FR)	-	01	-
RP1061.01	Mini Cartridge Adapter (DE)	-	01	-
RP1062.01	Mini Cartridge Adapter (UK)	-	01	-



Mini Pressure Nitrogen Regulator 14.

It is a mini pressure regulator for one-shot cartridges of Nitrogen and Nitrogen -Hydrogen.

Technical Features:

Inlet pressure: max 110Bar Outlet pressure: max 10Bar Hose lenght: 200cm Connection: 1/4 SAE swivel connection with final ball valve





Nitrogen Pressure Regulator



It is a pressure regulator for nitrogen cartridge.

Technical Features: 300 Bar (IN) / 0÷60 Bar (OUT). Ø 40 mm high- and low-pressure manifold gauges. 1/4 SAE Male connection.

ArtNr.	Description	€	8	* **
RK1325.IT	Connection W21,7 x 1"1/4 - UNI 4409 (IT)	-	01	-
RK1280.DE	Connection W24,32 x 1"1/4 - DIN477 no. 10 (DE)	-	01	-
RK1281.UK	Connection G5/8" - BS 341 no. 3 (UK)	-	01	-
RK1282.FR	Connection Ø 21,7 x 1,814 - NF E 29-650/c (FR)	-	01	-

AC/R Systems Pressure Regulator & Tester



Pressure regulator technical features: Inlet pressure: max 200Bar Output pressure: max 60Bar Connection: 1/4 SAE male **The kit contains:** 200cm hose with 1/4 SAE final ball valve. Ø 80 mm Manometer with defined sectors and 1/4 SAE connection.

Adapter 1/4 SAE male x 5/16 SAE female.

ArtNr.	Description	€	8	
RK1432.IT	W21,7 x 1"1/4 - UNI 4409 (IT)	-	01	
RK1433.DE	W24,32 x 1"1/4 - DIN477 no. 10 (DE)	-	01	
RK1434.UK	G5/8" - BS 341 no. 3 (UK)	-	01	
RK1435.FR	Ø 21,7 x 1,814 - NF E 29-650/c (FR)	-	01	



Leak-Testing Gauges



Ball Valve with 1/4 SAE Male Connection. Ø 80 mm gauge, class 1.0, defined sectors, position indicator and calibration screw. Green or black protective rubber gauge.



Atom Machine

Ultrasonic Nebulizer - 48 applications

Technical Features:

01.

rapidly.

12V car power cord. Nebulization rate: n.a. Designed for 48 automatic cycles. Automatic switch-off: 30 minutes. Body made in plastic. Noise level: n.a. Operating temperatures: n.a. Dimensions: L170 x P110 x H170 mm. Weight: 0.7 Kg.



n Pu

Atom Machine

ULTRASONIC NEBULIZERS are electronic ultrasonic nebulizer devices designed to instantaneously generate the nebulization of a purifying liquid that is distributed by the A/C system. The main advantage of this system is the nebulization of the liquid at room temperature. This helps to avoid the phenomenon of condensation that typically occurs when a liquid is nebulized by heating. The particles of liquid sprayed with **ULTRASONIC NEBULIZERS** have a size of less than 5µm so they don't settle on the surfaces, propagating totally in the A/C system and in the passenger cockpit. This condition cannot be achieved when using typical aerosol cans, because the particles atomized, due to their size and heaviness, precipitate rapidly.



Technical features: INPUT : 100 - 240V ~ / 50/60Hz 0.8A OUTPUT: 12V 2500mA Power cord with EU, UK, USA plugs.

ArtNr.	€	8
PW1003.01	-	

Atom Ultra

02.

Purifying Treatment for Atom Machine

ATOM ULTRA is a purifying liquid specifically formulated to be used ONLY with ultrasonic nebulizer ATOM MACHINE.

Benefits:

- ✓ Restores and refreshes interior air quality.
- Excellent long-term effect.
 The "No Odor" formulation eliminates unpleasant
- odors by reacting with their molecules and permanently incorporating them.



ArtNr.	Description	€	8	***
AB0018.G.01	Atom Ultra 120 mL Lemon	-	12	-
AB0022.G.01	Atom Ultra 120 mL Pure	-	12	-
AB0024.G.01	Atom Ultra 120 mL Mint	-	12	-
AB0026.G.01	Atom Ultra 120 mL Smoki	-	12	-
AB0027.G.01	Atom Ultra 120 mL Woofi	-	12	-
AB0028.G.01	Atom Ultra 120 mL No Odor	-	12	

Atom Machine Kit

It's a smart box that contains 1 ATOM MACHINE ultrasonic nebulizer and 48 bottles of ATOM ULTRA 120 mL each. 6 fragrances are available.



Pure Zone Machine Ultrasonic Nebulizer for Professional Use

Technical Features:Power supply: 220V - 50/60 Hz.Power supply: 110V - 50/60 Hz.Power supply: 12V car power cordCycle time: 11' 45" at 20°C.Automatic switch-off on reaching
the minimum liquid level.Noise level: \leq 70 dB.Operating temperatures: 0°C \div 60°CNebulization rate: \approx 500 mL/h.Blower Flow: 34m³/h.Dimensions: L285 X P130 X H210 mm.Weight: 3.1 Kg.

04.

05.

06.



ArtNr.	Description	€	8	* **
AB1027	PureZone Machine	-	01	56
AB1027.UK	PureZone Machine + UK Plug	-	01	56
AB1027.USA	PureZone Machine + 110 V USA Plug	-	01	56



Atom Liquid

Purifying Treatment for Ultrasonic Nebulizers

ATOM LIQUID is a purifying liquid to be used with ultrasonic nebulizers.

	Pure ArtNr.	Mint ArtNr.	Lemon ArtNr.	Smoki ArtNr.	Woofi ArtNr.	€	8	* **
250 mL	AB0022.Q.01	AB0024.Q.01	AB0018.Q.01	AB0026.Q.01	AB0027.Q.01	-	24	-
5 Litri	AB0022.P.01	AB0024.P.01	AB0018.P.01	AB0026.P.01	AB0027.P.01	-	02	168
10 Litri	AB0022.D.01	AB0024.D.01	AB0018.D.01	AB0026.D.01	AB0027.D.01	-	01	48

🗳 Killer Odor

Odour Eliminator for Ultrasonic Nebulizer

KILLER ODOR is an anti-odor treatment for ultrasonic nebulizers to eliminate unpleasant smells.

ArtNr.	Description	€	8	* **
AB1041.G	120 mL Bottle	-	12	3828
AB1041.J	200 mL Bottle	-	10	-
AB1041.P	5 Litres Tank	-	02	168
AB1041.D	10 Litres Tank	-	01	48



07. 🖪 Smoki

Cigarette Smoke Odor Remover

SMOKI is a special chemical product formulated to eliminate cigarette and tobacco odor from cockpits and surfaces.

Smoki doesn't cover up the smell but irreversibly absorbs it, purifying the environment. It doesn't damage the materials and is effective for a long time.


How does it work?

SMOKI is available in a spray bottle format to be used on surfaces. It is not necessary to ventilate the vehicle after the treatment.

Benefits:

✓ It doesn't cover up the odors but irreversibly absorbs them.
✓ Does not damage materials.
✓ Long-time duration time.



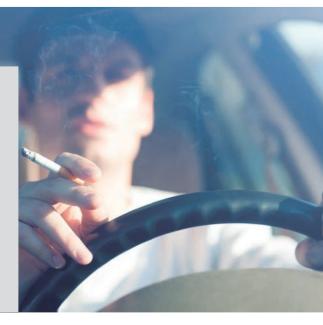



Evaporator Cleaner Foam Foam Cleaner for Evaporators

EVAPORATOR CLEANER FOAM is a foamy cleaner for evaporators that cleans, refreshes and purifies the air distribution duct, absorbing and expelling all the contaminating particles (dust, dirt, allergens and micro-organisms) that can affect the air quality and create unpleasant smells.

Its foam structure, which increases in volume once inserted in the unit to be treated, allows to reach and remove even the dirtiest areas difficult to reach.

EVAPORATOR CLEANER FOAM is also available in a liquid version: EVAPORATOR CLEANER

For deeper cleaning we recommend the sequenced use of EVAPORATOR CLEANER FOAM (leave to act 5 minutes) and EVAPORATOR CLEANER. The combined application of both will facilitate the flow of the foam towards the condensate drain ensuring its perfect cleaning and reducing the drying time of the treated unit.

Evaporator Evaporator Oteanner For

HACCP
 Evaporator Cleaner
En-Form Cleanwer In AC Syntems Unspote on En-
Ri de largeza para eleternais de A/C Note largeza para eleternais de A/C Note ingliasmes A/C Note ingliasmes A/C
Angrue overstormente en songerundengen Serr do centerenia parownieder aladoth liemenemente

Evaporator Cleaner Foam - Foamy Cleaner						
ArtNr.	Description	€	P	***		
AB1049.F.01	100 mL Aerosol Can	-	30	4800		
AB1049.J.01	200 mL Aerosol Can	-	24	2376		
AB1049.N.01	400 mL Aerosol Can	-	12	1344		
Evaporator Cleaner - Liquid Cleaner						
ArtNr.	Description	€	8	***		
AB1084.J.01	200 mL Aerosol Can		24	2376		
AB1084.N.01	400 mL Aerosol Can	-	12	1344		

Interior Purifier

10.

DEFFECO

09.

orator 1er Foarr

Purifying Treatment for Cockpits

INTERIOR PURIFIER is a purifying treatment to clean and refresh the cockpits, leaving a pleasant fragrance of cleanliness. Its special thin particles were specially created to eliminate any contaminants present in the area after the evaporator cleaning operation. We recommend the use of this product in combination with EVAPORATOR CLEANER FOAM - Foamy Cleaner for A/C Systems or EVAPORATOR CLEANER - Aerosol Cleaner for A/C Systems to obtain a complete cleaning treatment of both -the A/C system and of the surrounding area.



	the second se								
	Talc ArtNr.	Strawberry ArtNr.	Peach ArtNr.	Mint ArtNr.	Lemon ArtNr.	Vanilla ArtNr.	Green Apple ArtNr.	€	8
100 mL	AB1056.F.01	AB1057.F.01	AB1058.F.01	AB1050.F.01	AB1059.F.01	AB1060.F.01	AB1061.F.01	-	30
200 mL	AB1056.J.01	AB1057.J.01	AB1058.J.01	AB1050.J.01	AB1059.J.01	AB1060.J.01	AB1061.J.01	-	24
400 mL	AB1056.N.01	AB1057.N.01	AB1058.N.01	AB1050.N.01	AB1059.N.01	AB1060.N.01	AB1061.N.01	-	12

*

Total Care

Purifying Treatment for A/C Systems and Cockpits

TOTAL CARE is a complete purifying treatment to clean and refresh the evaporator and the cockpits, leaving a pleasant fragrance of cleanliness.

TOTAL CARE is composed of two aerosol cans: EVAPORATOR CLEANER FOAM -Foamy Cleaner for Evaporators and INTERIOR PURIFIER -Purifying Treatment for Interiors.

Benefits:

7 fragrances available. Easy to use.



Monsoon

12.High Pressure Scented Treatment
for Cockpit and Air Filters

MONSOON is a high-pressure scented spray which is useful for perfuming cockpits. It ensures a long persistence of the fragrance. MONSOON is also suitable for perfuming the air filter (before this one must be replaced). Its formula effectively refreshes the treated areas, leaving a pleasant feeling of cleanliness.

MONSOON is available in 3 fragrances: (Lemon, Mint, Pure) and in the new formulation No Odor which allows to eliminate definitively any unpleasant odor.

<u>()</u>

м М Monsoon soon ol - Lemon ure Monsoon Monsoon osol - Mint sol - No Odor 600 mL 1008 DEFFE 1008 Met 1008 1008

Description	€	8	
600 mL Aerosol Can - Lemon	-	12	
600 mL Aerosol Can - Mint	-	12	
600 mL Aerosol Can - Pure	-	12	
600 mL Aerosol Can - No Odor	-	12	
	600 mL Aerosol Can - Lemon 600 mL Aerosol Can - Mint 600 mL Aerosol Can - Pure	600 mL Aerosol Can - Lemon-600 mL Aerosol Can - Mint-600 mL Aerosol Can - Pure-	600 mL Aerosol Can - Lemon-12600 mL Aerosol Can - Mint-12600 mL Aerosol Can - Pure-12



114

IT TV

172 ¥



Disinfectant Liquid with Bactericide and Virucidal Efficacy

SANIBACT is a medical and surgical disinfectant liquid specially developed for cleaning evaporators, ventilation channels and all surfaces where a deep level of disinfection is needed. SANIBACT is an extremely concentrated product: it needs a dilution of 1:25. If used pure, thanks to the special 1L bottle with trigger, it has even deeper and more effective action. CAUTION: do not use concentrated product on surfaces in contact with food. Effective against Flu, viruses, hepatitis B/C, HIV, rota virus, noro virus and ebola virus.

For bacteria it passes the tests: EN1276 - EN13697

For molds it passes the test: EN13697

APPLICATION: Ambulances, hospitals, medical cars, food and street food shops, refrigerated vehicles, vehicles for transporting live animals, school buses, touristic buses, trains and planes.

Benefits:

01.

SB HACCP

SaniBact

14

- Can be applied both in liquid and foamy form thanks to the special trigger.
- Effective detergent ensures the highest level of hygiene during the cleaning process.
- ✓ No odors or residues left
- ✓ Effective in 5 minutes from application, providing very deep and fast disinfectant action.
- ✓ Suitable for the HACCP plan.



ArtNr.	Description	€	8	* **
AB1085.K.01	1 Litre Bottle	-	06	570
AB1085.P.01	5 Litres Tank	-	02	168
AB1085.D.01	10 Litres Tank	-	01	48

Luxedo

Scented Revitalizing Treatment for Evaporators

LUXEDO is a specific scented chemical product, fast-acting and effective, formulated to clean evaporators. It removes organic residues and dirt accumulated over time, slowing down its reappearance. Its fast and effective action is optimal for the complete maintenance of vehicle evaporators. LUXEDO removes organic residues and dirt accumulated inside the system, avoiding its reappearance. It also has an intense purifying and reconditioning action. Non aggressive to the surfaces and the operator. No rinse needed. Suitable for the HACCP plan.

Benefits:

02.

Luxedo

 ✓ Can be applied in liquid and foamy form thanks to the special trigger. ✓ Specifically designed for evaporator cleaning. ✓ Intense purifying and reconditioning action. ✓ Suitable for the HACCP plan.

	1	ALL AND		
_				

ArtNr.	Description	€	8	* **
AB1073.K.01	1 Litre Spray Bottle	-	06	570
AB1073.P.01	5 Litres Tank	-	02	168
AB1073.D.01	10 Litres Tank	-	01	48

📑 Eco Jab

Alkaline Biodegradable Evaporator Cleaner

ECO JAB is an effective evaporator cleaner with absolute respect for the environment: it does not contain acids, phosphates, solvents and soda. Biodegradability is guaranteed at very high levels, thanks to the use of natural surfactants that have a higher biodegradability than that is required by current European laws. ECO JAB is non aggressive for materials. Has extremely fast action. Effective cleaner to remove organic residues, dust and mold. Safe for the operator. No traces harmful to the environment. ECO JAB can be diluted with water up to 1:6 depending on the type of dirt to be removed. The more concentrated the product is used, the more effective it will be. The 1L bottle has a special trigger that allows the application in both forms: liquid and foamy.

HACCP ECCO Jab Alter pre for Endoarden Bodegradshe Market pre for Endoarden pre Bodegradshebe Cleaner for Bodegradshe

Benefits:

03.



 ✓ High biodegradability. ✓ Specifically designed for evaporator cleaning. ✓ Suitable for the HACCP plan. ✓ Not perfumed: suitable for applications in food-present environments.

ArtNr.	Description	€	8	* **
AB1071.K.01	1 Litre Spray Bottle	-	06	570
AB1071.P.01	5 Litres Tank	-	02	168
AB1071.D.01	10 Litres Tank	-	01	48

Power Clean - IN

High Pressure Cleaner for Evaporators

POWER CLEAN IN is a cleaner for evaporators in an aerosol can, specially designed to achieve a high and constant supply pressure that allows to easily remove extreme dirt that accumulates between the fins of the finned batteries.

Benefits:

PCI

Power

Clean - IN

 ✓ Specifically indicated for a correct and frequent cleaning of the evaporators. ✓ No rinse needed. ✓ Dries quickly. ✓ Suitable for the HACCP plan.

<!



ArtNr.	Description	€	F	* **
AB1063.J.01	200 mL Aerosol Can	-	24	2376
AB1063.N.01	400 mL Aerosol Can	-	12	1344
AB1063.U.01	600 mL Aerosol Can	-	12	1008

CONDENSERS CLEANING TREATMENTS



High Pressure Cleaner for Condensers

POWER CLEAN OUT is a special aerosol can that has been designed to achieve a high and constant supply pressure that allows to easily remove extreme dirt that accumulates between the fins of the condensers. POWER CLEAN OUT is indicated for both type of condensers with remote units and integrated ones.

Benefits:

 ✓ Specifically indicated for a correct and frequent cleaning of all condensers. ✓ No rinse needed. ✓ Suitable for the HACCP plan.



Power

an - OUT

Nano Acid Cleaner Acid Cleaner for Condensers

NANO ACID CLEANER is an acid condenser cleaner that, thanks to its advanced formulation, effectively disincrust the treated surface, removing even the most stubborn deposits of rust or salt-type incrustations. It is particularly indicated for dissolving the dirt deposited in the cracks of the finned batteries.

How does it work?

01.

d Cleaner

NANO ACID CLEANER can be diluted with water up to 1:8 depending on the type of scale to be removed. The more concentrated the product is used, the more effective it will be. Its recommended to avoid the contact with varnished materials. The 1L bottle has a special trigger that allows the application in both foamy and liquid form. Rinse the product thoroughly with line water until its complete elimination.

The combined sequential action of Nano Acid Cleaner and Nano Alkaline Cleaner guarantees deeper cleaning in case of particularly stubborn dirt.

Benefits:

✓ Specifically designed for condenser cleaning.
 ✓ Ideal for restoring the efficiency of the condenser heat exchange.
 ✓ Removes the most stubborn incrustations.
 ✓ Suitable for the HACCP plan.



>	ArtNr.	Description	€	8	* **
	AB1107.K.01	1 Litre Spray Bottle	-	06	570
	AB1107.P.01	5 Litres Tank	-	02	168
	AB1107.D.01	10 Litres Tank	-	01	48

Nano Alkaline Cleaner Alkaline Cleaner for Condensers

NANO ALKALINE CLEANER is an alkaline condenser cleaner that, thanks to its special formulation, effectively degreases surfaces removing even the most stubborn deposits of organic residues, grease, dust, pollen and smog.

How does it work?

NANO ALKALINE CLEANER can be diluted with water up to 1:8 depending of the type of dirt to be removed. The more concentrated product is used, the more effective it will be. Its recommended to avoid contact with varnished surfaces. The 1L bottle has a special trigger, that allows the application in both foamy and liquid form.

The sequential application of Nano Acid Cleaner and Nano Alkaline Cleaner is recommended for more intense action, ensuring the removal of the most stubborn dirt.

Benefits:

✓ Specifically designed for condenser cleaning. ✓ Ideal for restoring the efficiency of the condenser heat exchange. ✓ Removes stubborn organic residues: grease, dust, pollen and smog. ✓ Suitable for the HACCP plan.



	ArtNr.	Description	€	8	* **
Z.	AB1106.K.01	1 Litre Spray Bottle	-	06	570
	AB1106.P.01	5 Litres Tank	-	02	168
	AB1106.D.01	10 Litres Tank	-	01	48



02.





Ultra Cleaning TECHNOLOGY

Acid Ultra, Alkaline Ultra and Evo Ultra are pure active substances specifically designed and formulated to dilute with water and used to clean AC/R Evaporators and Condensers.

Their formula allows to create eco-friendly products, as the quantity of plastic that should be used to contain the traditional concentrated cleaners has been removed, reducing the impact on the ecosystem.

Indeed, Acid Ultra, Alkaline Ultra and Evo Ultra are packed in 250 mL glass bottles to create 5L of cleaner which removes even the most stubborn dirt. The optimal recommended dilution is 50 mL per liter of water.

The supplied dispenser allows to obtain the desired quantity of cleaner with the precision that a so performing chemical product needs, without dilute the whole product in a single solution.

The extraordinary formula of these active substances allows us to overcome the limits of water hardness. In fact, these products can be diluted with any type of water, including very hard ones and do not leave any residue on the surfaces.







EU

Evo Ultra

250m

Acid Cleaner for Condensers

ACID ULTRA is an active substances formula that diluted with water create an ultimate powerful acid cleaner for condenser that descales even the most stubborn deposits (rust, salt deposits) restoring the efficiency of the condenser heat exchange.



🗳 Alkaline Ultra

Alkaline Cleaner for Condensers

ALKALINE ULTRA is an active substances formula that diluted with water create an ultimate powerful alkaline cleaner for condenser which can effectively degreases surfaces by removing even the most stubborn deposits of organic residues, grease, dust, pollen and smog.

ArtNr.	€	8	***
AB1223.Q.S1	-	06	570



Evaporators Cleaner

EVO ULTRA is an active substances formula that diluted with water create an ultimate powerful cleaner for evaporator which can effectively clean the surfaces by removing even the most stubborn deposits of organic residues, grease and incrustations.

ArtNr.	€	8	***
AB1225.Q.S1	-	06	570



12



Alkaline Ultra

250 ml

SPARE PARTS FOR VEHICLE A/C SYSTEMS

SealUp

01.

Removable A/C Joint Sealant -Warranty Seal

SEALUP is a joint sealant for A/C systems that forms a chemically resistant film over the threads. It remains flexible, adheres to internal surfaces filling all micro voids. Ideal on plastic and metal materials subjected to extreme vibrations. It works from a temperature of -90° to +200°. Resistant both in vacuum and with pressure up to 500 Bar / 7250 Psi.

How does it work?

Applied to threaded and flanged joints and gaskets SEALUP adheres to surfaces and forms a tight seal, flexible but long-lasting. It prevents leaks from the pipe joints, fittings and bolts. It resists in contact to multiple chemicals including refrigerant gases, fuel gases, lubricants, fuels, solvents and industrial gases.

Benefits:

 ✓ It prevents leaks. ✓ Allows the reopening of the joints. ✓ Easy to remove. ✓ Plastic tube.
 ✓ Threaded spout for better sealing.

*

ArtNr.	Description	€	8	***
TR1157.Y.01	50 mL Tube	-	30	5400

Thor

02.

Thor

200 m

Sealant Remover and Surface Cleaner Spray

THOR is a special fast-acting and effective chemical product, formulated to remove the residues of sealants from surfaces. Ideal for surfaces cleaning before using EXTERNAL and FIXQUICK (p.9).

How does it work?

Directly spray THOR on the surface contaminated by the sealant, wait two minutes and clean with a cloth.



ArtNr.	Description	€	8	***
TR1013.J.01	200 mL Aerosol Can	-	24	2376



*

ERRECOM Charging Hoses SAE J2196 SAE J2888

On	-l ine	Swiv	vel Co	nn	ections		3/8 SAE	E connection	ons				
					cotions		Cm	Blue	Red	Yellow	€	Set 3 PCS	€
					A and a	4 - 20	100	TB7453B	TB7453R	TB7453Y	-	TBK295	-
					THE REAL PROPERTY OF	183	200	TB7553B	TB7553R	TB7553Y	-	TBK304	-
							300	TB7653B	TB7653R	TB7653Y	-	TBK305	-
							350	TB7753B	TB7753R	TB7753Y	-	TBK306	-
1/4 SA	E connecti	ons		N.			1/2 ACI	//E connec	tions				
Cm	Blue	Red	Yellow	€	Set 3 PCS	€	Cm	Blue	Red	Yellow	€	Set 3 PCS	€
100	TB7451B	TB7451R	TB7451Y	-	TBK287	-	100	TB7454B	TB7454R	TB7454Y	-	TBK307	-
200	TB7551B	TB7551R	TB7551Y	-	TBK288	-	200	TB7554B	TB7554R	TB7554Y	-	TBK308	-
300	TB7651B	TB7651R	TB7651Y	-	TBK289	-	300	TB7654B	TB7654R	TB7654Y	-	TBK309	-
350	TB7751B	TB7751R	TB7751Y	-	TBK290	-	350	TB7754B	TB7754R	TB7754Y	-	TBK310	-

€

€

-

Set 3 PCS

TBK351

TBK352

TBK353

TBK354

Set 3 PCS

TBK355

TBK356

TBK357

TBK358

€

€





M12x1	,5 Dοι	uble C	onn	ection		a linit co
Cm Blue	Red	Yellow	€	Set 3 PCS	€	A CONTRACT
100 TB767	B TB7676R	TB7676Y	-	TBK443	-	
200 TB767	'B TB7677R	TB7677Y	-	TBK444	-	
300 TB767	B TB7675R	TB7675Y	-	TBK445	-	
350 TB767	B TB7678R	TB7678Y	-	TBK446	-	

CONTINENTAL Charging Hoses SAE J2196 SAE J2888

On	-l ine	Swiv	iel Co	nne	ctions		3/8 SA	E connecti	ons				
					Clions		Cm	Blue	Red	Yellow	€	Set 3 PCS	€
					and and		100	TB7403B	TB7403R	TB7403Y	-	TBK104	-
					TANANA I	1 Cal	200	TB7503B	TB7503R	TB7503Y	-	TBK105	-
						SHE .	300	TB7603B	TB7603R	TB7603Y	-	TBK106	-
				0110	12 / 12	1000	350	TB7703B	TB7703B	TB7703Y	-	TBK107	-
							550	10//000	10//00/1	1011001			
1/4 SA	E connectio	ons						ME connec		1211001			
1/4 SA Cm	E connectio Blue	ons Red	Yellow	£	Set 3 PCS	€				Yellow	€	Set 3 PCS	€
			Yellow TB7401Y	€ -	Set 3 PCS TBK096	€ -	1/2 A(ME connec	tions		€ -		€
Cm	Blue	Red		-			1/2 A0 Cm	CME connec Blue TB7404B	tions Red	Yellow	-	Set 3 PCS	-
Cm 100	Blue TB7401B	Red TB7401R	TB7401Y	•	ТВК096	-	1/2 A Cm 100	CME connect Blue TB7404B TB7504B	tions Red TB7404R	Yellow TB7404Y		Set 3 PCS TBK108	-

Ra	II Val	VAC					3/8 SAE	E connectio	ons				
Da	ii vai	vcs				4	Cm Cm	Blue	Red	Yellow	€	Set 3 PCS	€
					210	-	100	TB7415B	TB7415R	TB7415Y	-	TBK151	-
					The state		200	TB7515B	TB7515R	TB7515Y	-	TBK152	-
					5	X	300	TB7615B	TB7615R	TB7615Y	-	TBK153	-
							350	TB7715B	TB7715R	TB7715Y	-	TBK154	-
1/4 SA	E connectio	ons		-				TB7715B ME connec		TB7715Y	-	TBK154	-
1/4 SA Cm	E connectio Blue	ons Red	Yellow	£	Set 3 PCS	€				TB7715Y Yellow	- €	TBK154	- €
			Yellow TB7413Y	€ -	Set 3 PCS TBK144	€ -	1/2 ACM	ME connec	tions				
Cm	Blue TB7413B	Red				-	1/2 ACM Cm 100	ME connect Blue	ions Red	Yellow	€	Set 3 PCS	€
Cm 100	Blue TB7413B	Red TB7413R	TB7413Y	-	TBK144	-	1/2 ACM Cm 100 200	ME connect Blue TB7416B	Red TB7416R	Yellow TB7416Y	€ -	Set 3 PCS TBK155	€

N/I-1	1.1 5	Con	nootic				3/8 SA	E connecti	ons				
IVII	4X I, J		nectio	JIS			Cm	Blue	Red	Yellow	€	Set 3 PCS	
					2 10-2		100	TB7407B	TB7407R	TB7407Y	-	TBK120	
					Standard and a	1- 2	200	TB7507B	TB7507R	TB7507Y	-	TBK121	
						1/2	300	TB7607B	TB7607R	TB7607Y	-	TBK122	
						1	350	TB7707B	TB7707R	TB7707Y	-	TBK123	
1/4 SA	E connectio	ons					1/2 AC	ME connec	tions				
1/4 SA Cm	E connectio Blue	ons Red	Yellow	£	Set 3 PCS	€	1/2 AC Cm	ME connec Blue	tions Red	Yellow	£	Set 3 PCS	
			Yellow TB7405Y	€ -	Set 3 PCS TBK112	€ -				Yellow TB7408Y	€ -	Set 3 PCS TBK124	
Cm	Blue TB7405B	Red		-		-	Cm	Blue	Red		-		
Cm 100	Blue TB7405B TB7505B	Red TB7405R	TB7405Y		TBK112	-	Cm 100	Blue TB7408B	Red TB7408R	TB7408Y	-	TBK124	

М1	2x1 5	Con	nectio	ne		
	271,0		neen	5115		
					1.16	
					THE REAL PROPERTY OF	6.5
					15 100	
1/4 SA	E connection	ons		Nel 1		
1/4 SA Cm	E connectio Blue	ons Red	Yellow	€	Set 3 PCS	€
			Yellow TB7079Y	€ -	Set 3 PCS TBK407	€ -
Cm	Blue TB7079B	Red		-		-
Cm 100	Blue TB7079B	Red TB7079R	TB7079Y	-	TBK407	-

M1 :	2x1,5	Dou	ble Co	onno	ection	
Cm	Blue	Red	Yellow	€	Set 3 PZ	€
100	TB7687B	TB7687R	TB7687Y	-	TBK447	-
200	TB7688B	TB7688R	TB7688Y	-	TBK448	-
300	TB7689B	TB7689R	TB7689Y	-	TBK449	-
350	TB7690B	TB7690R	TB7690Y	-	TBK450	-

■ Special Low-Pressure Quick Coupler for Vehicles A/C Systems with R134a

8 01

for FORD - JAGUAR

ArtNr.	Description
RA1060.01	Low Side Port





M12X1,5 (R1234yf Quick Coupler)

RP1057.01


Quick Coupler Reduction

ArtNr.	Description	8	€
RP1008.01	3/8 SAE Male X 1/4 SAE Female A	05	-
RP1009.01	1/4 SAE Male X 1/2 ACME Female with Gasket B	05	-
RP1017.01	1/2 ACME Male X 1/4 SAE Female with Gasket ${f C}$	05	-
RP1016.01	M14x1,5 Male X 1/4 SAE Male D	05	-
RP1057.01	M12x1,5 Male x 1/4 SAE Male E	05	-



□ Special Adapters M14x1,5 x M12x1,5

ArtNr.	Description	8	€
RP1063.01	M14x1,5 (1) x M12x1,5 (2)	01	-
RP1064.01	M14x1,5 (3) x 1/4 SAE (4)	01	-



■ Ball Valve with Swivel Connection

ArtNr.	Male	Female	8	€
RP1119.01.*	1/4 SAE	1/4 SAE	01	-
RP1219.01.*	3/8 SAE	1/4 SAE	01	-
RP1035.01.*	1/2 ACME	1/4 SAE	01	-
RP1319.01.*	5/16 SAE	1/4 SAE	01	-
RP1619.01.*	5/16 SAE	5/16 SAE	01	-

* ADD TO THE CODE: Y = YELLOW VALVE - B = BLUE VALVE - R = RED VALVE - G = GREEN VALVE - W = WHITE VALVE

■ Ball Valve with Male Connection

ArtNr.	Description	8	€
RP1631.01.*	1/4 SAE	01	-
RP1037.01.*	3/8 SAE	01	-
RP1040.01.*	1/2 ACME	01	-
RP1636.01.*	5/16 SAE	01	-

* ADD TO THE CODE: Y = YELLOW VALVE - B = BLUE VALVE - R = RED VALVE - G = GREEN VALVE - W = WHITE VALVE

Spare Parts for Hoses & Ball Valves

ArtNr.	Description	8	€
RG9010.01	1/4 - 5/16 SAE HNBR - 1/2 ACME Gasket	01	-
RG9012.01	1/4 - 5/16 SAE NEOPRENE - 1/2 ACME Gasket	01	-
RG9002.01	3/8 SAE HNBR Gasket	01	-
TBR901.01	Depressor	01	-



ArtNr.	Description	8	€
RP1019.01	3/4 NPS x 1/4 SAE R134a Reducer	10	-
RP1013.01	3/4 NPS x 5/16 SAE R134a Reducer	10	-
RP1101.01	R1234yf Cylinder HP Reducer	10	-





5	
€	
-	M14X1,5 (R134a Connection) (3)
-	
	RP1064.01 1/-



R134a ERRECOM Quick Couplers meet SAE J639

ArtNr.	Description	8	€
RA1053.01	1/4 SAE - High Side Port	01	-
RA1054.01	1/4 SAE - Low Side Port	01	-
RA1055.01	M14X1,5 - High Side Port	01	-
RA1056.01	M14X1,5 - Low Side Port	01	-

R1234yf Errecom Quick Couplers meet SAE J2888

ArtNr.	Description	8	€
RA1050.01	M12x1,5 - High Side Port	01	-
RA1051.01	M12x1,5 - Low Side Port	01	-

R134a Quick Couplers - Made in China

ArtNr.	Description	8	€
RA1000.01	1/4 SAE - High Side Port	01	-
RA1001.01	1/4 SAE - Low Side Port	01	-
RA1002.01	M14X1,5 - High Side Port	01	-
RA1003.01	M14X1,5 - Low Side Port	01	-

R1234yf Quick Couplers - Made in China

ArtNr.	Description	\$	€
RA1070.01	M12x1,5 - High Side Port	01	-
RA1071.01	M12x1,5 - Low Side Port	01	-

R134a Quick Couplers without Tap - Made in China

ArtNr.	Description	8	€
RA1008.01	1/4 SAE - High Side Port (Straight)	01	-
RA1009.01	1/4 SAE - Low Side Port (Straight)	01	-
RA1004.01	1/4 SAE - High Side Port	01	-
RA1005.01	1/4 SAE - Low Side Port	01	-
RA1006.02	3/8 SAE - High Side Port	01	-
RA1007.02	3/8 SAE - Low Side Port	01	-
RA1006.01	M14X1,5 - High Side Port	01	-
RA1007.01	M14X1,5 - Low Side Port	01	-
		0.	-











□ Special High-Pressure Quick Coupler for Vehicles A/C Systems with R134a

For BMW - FORD - MERCEDES - VOLVO	
-----------------------------------	--

ArtNr.		Description	8	€
RA1018.01	High Side Port		01	-



□ Special High-Pressure Quick Coupler for Vehicles A/C Systems with R134a

For BMW - FORD - MERCEDES - VOLVO

ArtNr.		Description	8	€
RA1032.01	High Side Port		01	-

R134a Special Adapter

For vehicles without low-pressure port

ArtNr.	B	€
RK1208	01	-





Automatic Recovery & Charging Units

Technical Features:

01.

02.

LCD alphanumeric display 200X40 mm with 17 languages. Software with sliding messages and alarms. Updatable data base (by USB port) of more than 900 cars and trucks. Data base on customer's choice (30 positions). 3 ways of use: manual/half-automatic/automatic cycles. Supplementary condenser. Vacuum test with beeper. Min. & max. weight alarms. Manual fresh oil injection. High- and low-pressure gauges with "Ok-Not Ok" scales. 300 cm. 1/4 SAE charging hoses. Power supply: 220 V/50Hz. Power supply Plug: SCHUCO 1/3 Cv ermetic compressor. Single stage vacuum pump 70 L/min. - 0,05 MBar. Internal storage tank of 12,5 Kg with heater. Dimensions: 550 X 450 X H 990 mm. Weight: 65 Kg.

Available models: For refrigerant gas R134a (Art. Nr. VP1026.01). For refrigerant gas R1234yf (Art. Nr. VP1033.01).

ArtNr.	Description	€	8
VP1026.01	Automatic Recovery & Charging Unit for R134a	-	01
VP1033.01	Automatic Recovery & Charging Unit for R1234yf	-	01

Vacuum Pumps

2 Stages Vacuum Pumps with Solenoid Valve and Vacuum Gauge

Power supply: 220 v/50 hz. Vacuum gauge: ø 80 mm class 1.6. Class 1.6. Fittings: 1/4 SAE.

ArtNr.	Capacity (I/min)	Ultimate Vacuum (mbar)	Oil (mL)	Dimension (mm)	Weight (Kg)	€
VP1017.01	70	0,003	250	315x124x240	8,6	-

POMPA DOPPIO STADIO

0

01. □ 1-Ways Manifold

ArtNr.	Description	Fitting	Refrigerant Scale	CLASS	€
MN1115.01	with Ø 68 mm gauge HP	1/4 SAE	R32 - R410a	1.0	-
MN1116.01	with Ø 68 mm gauge HP	5/16 SAE	R32 - R410a	1.0	-
MN1117.01	with Ø 68 mm gauge LP	1/4 SAE	R32 - R410a	1.0	-
MN1118.01	with Ø 68 mm gauge LP	5/16 SAE	R32 - R410a	1.0	-

02.

2-Ways Manifold

ArtNr.	Description	Fitting	Refrigerant Scale	CLASS	€
MN1119.01	with Ø 68 mm gauge	1/4 SAE	R32 - R410a	1.0	-
MN1120.01	with Ø 68 mm gauge	5/16 SAE	R32 - R410a	1.0	-

03.

□4-Ways Membrane Manifold

ArtNr.	Description	Fitting	Refrigerant Scale	CLASS	€
MN1121.01	with Ø 68 mm gauge	1/4 SAE	R32 - R410a	1.0	-
MN1122.01	with Ø 68 mm gauge	5/16 SAE	R32 - R410a	1.0	-

04.

4-Ways Ball Valves Manifold

Ì	ArtNr.	Description	Fitting	Refrigerant Scale	CLASS	€	
	MN1123.01	with Ø 68 mm gauge	1/4 SAE	R32 - R410a	1.0	-	
	MN1124.01	with Ø 68 mm gauge	5/16 SAE	R32 - R410a	1.0	-	



Kit for Vehicles A/C System Maintenance

01.

Complete, compact and useful kit designed for easier vehicles A/C system maintenance. The organiser is very easy to handle, carry and store.

Top Kit is available in the following colours:

orange, blue, yellow, black and green.

Kit consists of 4 different boxes:

- ✓ Box 1: Fast Moving Green Hnbr O-Rings Kit 120/240/360 pcs. (Art.-Nr. RK1048, RK1166, RK1001)
- ✓ Box 2: Special Gaskets Kit (Art.-Nr. RK1140)
- ✓ Box 3: Maintenance Springlock Connections Kit (Art.-Nr. RK1050)
- ✓ Box 4: Kit Valve Cores and Caps Kit (Art.-Nr. RK1060)




ArtNr.	Description	8	€
RK1363*	Box 1 - 120 pcs of O-Rings	01	-
RK1362*	Box 1 - 240 pcs of O-Rings	01	-
RK1161*	Box 1 - 360 pcs of O-Rings	01	-

* ADD TO THE CODE:

AR = ORANGE / BL = BLUE / GL = YELLOW / NR = BLACK / VD = GREEN

□ Fast-Moving Green HNBR O-Rings Kit - BOX 1



ArtNr.	Description	8	€
RK1048	05 O-Rings each code (120 Total O-Rings)	01	-
RK1166	10 O-Rings each code (240 Total O-Rings)	01	-
RK1001	15 O-Rings each code (360 Total O-Rings)	01	-



Special Gaskets Kit - BOX 2

RG1073.01	RG1074.01	RG1075.01	RG1076.01
0	O _{5 PCS}	O _{5 PCS}	O PCS
BG1077.01	RG1078.01	RG1079.01	BG1080.01
Q	O PCS	Q	U.
RG1081.01	RG1082.01	RG1083.01	RG1084.01
3 PCS	O 3 PCS	O S PCS	O _{3PCS}
ArtNr.	F	€	
RK1140	01	-	



Maintenance Springlock Connections Kit - BOX 3

RL1006.01	RG2001.01	RL100	02.01
0 1PC	O 10 PCS	•	1 PC
RL1007.01	RG2002.01	RL100	03.01
1 PC	O 10 PCS		1 PC
RL1008.01	RG2003.01	RL100	04.01
0 1PC	O 10 PCS		1 PC
RL1009.01	RG2004.01	RL100	05.01
1 PC	O 10 PCS	(I)	1 PC
	~	•	
ArtNr.	¥	€	
RK1150	01	-	



R134a Replacement Service Ports - Valve Cores - Caps Kit - BOX 4

RV1001.01 RV1003.01		RV1004.01		RL10	01.01			
-63300-		-						
10 PCS	5 P	CS	5 PCS		1	PC		
RV2010.0	01	R	V2012.01	RV2014.0)1	F	V2015.01	
2 PCS		3	2 PCS	-F	2 PCS	8	2 PCS	
RT1000.01	RT10	01.01	RT1003.01	RT1004.01	RT10	17.01	RT1018.01	
5'PCS	5'PCS 5'PCS		S PCS	5IPCS	5 F	ecs	C _{5 PCS}	
RT1007.0)1	R	T1008.01	RT1010.01	RT10	02.01	RT1009.01	
5 PCS			5 PCS	S PCS		PCS	S PCS	
ArtNr.			8	€				
RK1060			01	-				



Complete A/C Service Port Caps Kit






R134a Replacement Service 3 Ports - Valve Cores - Caps Kit



Valves Core Kit



Complete Retrofit Adapters Kit

	RF1001.01	
3 PCS	-	3 PCS
	RF1016.01	
3 PCS		3 PCS
	RF1019.01	
3 PCS		3 PCS
	RF1014.01	
3 PCS	9	3 PCS
8	€	
	3 PCS 3 PCS 3 PCS	3 PCS RF1016.01 3 PCS Image: Constraint of the second se








Complete A/C Compressors Gaskets Kit






Green HNBR O-Ring Kit - 1.057 pcs

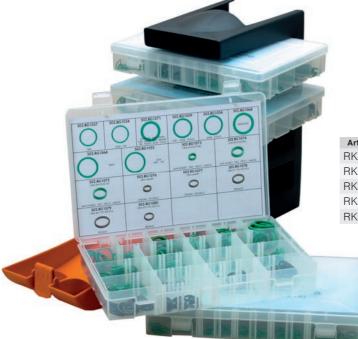

ArtNr.	Description	8	€
RK1141.AR	Orange Tower	01	-
RK1141.BL	Blue Tower	01	-
RK1141.GL	Yellow Tower	01	-
RK1141.NR	Black Tower	01	-
RK1141.VD	Green Tower	01	-

Universal Valve Core Removal Tool

ArtNr.	¥	€
RL1001.01	01	-



O-Rings Removal Tool

ArtNr.	8	€
RL1032.01	01	-

A/C Service Port Valves - 5 PCS Pack for Vehicles A/C Systems

ArtNr. RV2010.05	€ -	ArtNr. RV2011.05	€ -	ArtNr. RV2012.05	€ -	ArtNr. RV2013.05	€ -
Ð		Ð))		A	
HIGH SIDE PORT WITH STA (BMW - MERCEDES -		HIGH SIDE PORT WITH I (BMW - MERCEDES		LOW SIDE PORT WITH STA (BMW - MERCEDES -		LOW SIDE PORT WITH L (BMW - MERCEDES	
ArtNr. RV2014.05	€ -	ArtNr. RV2015.05	€ -	ArtNr. RV2016.05	€ -	ArtNr. RV2017.05	€ -
() ()		3		Ê		E	
HIGH SIDE PORT WITH STA (AUDI - FORD - OPEL - SE		LOW SIDE PORT WITH STA (AUDI - FORD - OPEL - S		HIGH SIDE PORT (STANDARD VAI		LOW SIDE PORT (STANDARD VA	
ArtNr. RV2029.05	€	ArtNr. RV2030.05	€				
HIGH PRESSUR REPLACEMENT SE		LOW PRESSU REPLACEMENT S					

A/C Service Port Caps - 5 PCS Pack

ArtNr. RT1000.05	£	ArtNr. RT1004.05	€ -	ArtNr. RT1003.05	€ -	ArtNr. RT1001.05	€ -
M9 X 1 - LOW SIDE R134a	SERVICE PORT CAP	M10 x 1,25 HIGH SIDE R134	a SERVICE PORT CAP	M8 x 1 LOW SIDE R134a	SERVICE PORT CAP	M8 x 1 HIGH SIDE R134a	SERVICE PORT CAP
ArtNr. RT1008.05	÷ ·	ArtNr. RT1007.05	e -	ArtNr. RT1010.05	e -	ArtNr. RT1009.05	e ·
M9 x 1 LOW SIDE R134a S	SERVICE PORT CAP	M10 x 1 HIGH SIDE R134a	SERVICE PORT CAP	CAP M8 x 1 LOW SIDE R134a SERVICE PORT CAP		M10 x 1 HIGH SIDE R134a SERVICE PORT CAP	
ArtNr. RT1017.05 JAPANESE CARS R134a SERVICE		ArtNr. RT1018.05 JAPANESE CAR R134a SERVICE		ArtNr. RT1002.05	€ - DRT PLASTIC CAP	ArtNr. RT1005.05 3/16 SAE SERVICE PC	€ - DRT PLASTIC CAP
ArtNr. RT1202.05	€ DRT BRASS CAP	ArtNr. RT1302.05 1/4 SA SERVICE PORT BRAS		ArtNr. RT1402.05 5/16 S SERVICE PORT BRAS		ArtNr. RT1044.05 HIGH/LOW PRES: PORT C	

A/C Compressor Caps - 5 PCS Pack

ArtNr. RT1021.05	€ -	ArtNr. RT1022.05	€ -	ArtNr. RT1025.05	€ -	ArtNr. RT1024.05	€ -
	P				P		P
FOR GM COM 3/4" - 16 UNF P		FOR GM COMPR 7/8" - 14 UNF PLAS		FOR GM COME 11/16" - 14 UNF P		FOR GM COMP 1" - 14 UNF PLA	

Replacement for A/C Service Port Valves - 5 PCS Pack									
ArtNr. RV1001.25	€ -	ArtNr. RV1002.05	€ -	ArtNr. RV1003.05	€ -	ArtNr. RV1004.05	€ -	ArtNr. RV1005.05	€ -
(25 PCS F	Pack)	THEEEEE	.					9 <i>000</i>	
STANDARD V CORE	/ALVE	VALVE COR GM - PORSCHE A		VALVE COR PEUGEOT - RENAULT -		VALVE CORE DENSO A/C		VALVE CORE N BUICK A/C S	
ArtNr. RV1006.05	€ -	ArtNr. RV1010.05	€ -	ArtNr. RV1011.05	€ -	ArtNr. RV1012.05	€ -		
E		winn t		s= €	Ĩ,	s=t :	1		
VALVE CORE BUICK A/C SY		VALVE CORE DENSO A/C SY		VALVE COR BMW - MINI - ROVER -		VALVE COR AUDI - FORD - OPEL -			

Retrofit Adapters - 5 PCS Pack

ArtNr. RF1000.05	€ -	ArtNr. RF1001.05	€ -	ArtNr. RF1019.05	€ -	ArtNr. RF1015.05	€ -	
1/4 SAE BRASS HIG	1/4 SAE BRASS HIGH SIDE PORT		W SIDE PORT	3/16 SAE ALUMINIUM I	HIGH SIDE PORT	90° 1/4 SAE BRASS HIGH SIDE PORT		
ArtNr. RF1016.05	€ -	ArtNr. RF1017.05	€ -	ArtNr. RF1012.05	€ -	ArtNr. RF1014.05	€ -	
	-							
90° 1/4 SAE BRASS LOW SIDE PORT		90° 3/16 SAE HIGH SIDE		1/4 SAE ALUMINIUM WITHOUT VAL		3/16 SAE ALUMINIUM WITHOUT VA		

A/C Compressor Gaskets - 5 PCS Pack

ArtNr. RG2005.05	€ -	ArtNr. RG2006.05	€ -	ArtNr. RG2007.05	€ -	ArtNr. RG2008.05	€ -
C		C		C)	C	
FOR GM COMF Ø8 Mm (IN) x Ø16,		FOR GM CON Ø11 Mm (IN) x Ø1		FOR GM COM Ø15 Mm (IN) x Ø23		FOR GM COMPRESSOR Ø17 Mm (IN) x Ø25,50 Mm (OUT)	
ArtNr. RG2009.05	€ -	ArtNr. RG2010.05	€ -	ArtNr. RG2011.05	€ -	ArtNr. RG2012.05	€ -
C	0)	C		C	
	FOR 5/8 GM COMPRESSOR Ø15,00 Mm (IN) x Ø28,00 Mm (OUT)		OMPRESSOR 31,60 Mm (OUT)	FOR HARRISON C Giallo Ø15,70 Mm (IN) 2		FOR HARRISON & GM COMPRESSO Black Ø15,20 Mm (IN) X Ø29,60 Mm (O	
ArtNr. RG2013.05	€ -	ArtNr. RG2014.05	€ -	ArtNr. RG2015.05	€ -	ArtNr. RG2016.05	€ -
0		C	2	E		P	
	FOR HARRISON & GM COMPRESSOR Green Ø16,60 Mm (IN) X Ø30,00 Mm (OUT)		M COMPRESSOR X Ø30,00 Mm (OUT)	FOR HARRISON C SHORT ALUMI		FOR HARRISON C LONG ALUMIN	

□ Special Gaskets for Vehicles A/C Systems - 25 PCS Pack

1		1					
ArtNr. RG1073.25	€ -	ArtNr. RG1074.25	€ -	ArtNr. RG1075.25	€ -	ArtNr. RG1076.25	€ -
0 =	8	0,		0.		0.	3
OEM FIAT 0010	551983	OEM FIAT 00	10552083	OEM FIAT 00	10552183	OEM PSA 64	460P0
ArtNr.	€	ArtNr.	€	ArtNr.	£	ArtNr.	€
RG1077.25		RG1078.25	-	RG1079925		RG1080-25	
OEM PSA 646	OEM PSA 6460P1		7701207274 (KIT)	RG1079.25 OEM F 770120727		RG1080.25 OEM RENAULT # 7701207274 (KIT)	
ArtNr. RG1081.05	€	ArtNr. RG1082.05	€	ArtNr. RG1083.05	€	ArtNr. RG1084:05	€
(05 PCS Pa	3	(05 PCS		(05PCS		(05 PCS F	
DAF - FIAT PSA RENA Ø 7,50 x H 8		DAF - FIAT PSA RE Ø 11 x H		DAF - FIAT PSA RE Ø 14 x H		DAF - FIAT PSA REI Ø 17,30 x H	

Springlock

ArtNr. €	ArtNr. €	ArtNr. €	ArtNr. €
RG2001.10 - (10 PZ Bag)	RG2002.10 - (10 PZ Bag)	RG2003.10 - (10 PZ Bag)	RG2004.10 - (10 PZ Bag)
0	0	0	0
G6 SPRINGLOCK	G8 SPRINGLOCK	G10 SPRINGLOCK	G12 SPRINGLOCK
ArtNr. € RL1002.01 -	ArtNr. € RL1003.01 -	ArtNr. € RL1004.01 -	ArtNr. € RL1005.01 -
G6 ROSSO SPRINGLOCK TOOL	G8 BLU SPRINGLOCK TOOL	G10 BLACK SPRINGLOCK TOOL	G12 WHITE SPRINGLOCK TOOL
ArtNr. € RL1006.01 -	ArtNr. € RL1007.01 -	ArtNr. € RL1008.01 -	ArtNr. € RL1009.01 -
LOW-PRESSURE GREY SPRINGLOCK TOOL (OPEL - GENERAL MOTORS)	HIGH-PRESSURE Rosso SPRINGLOCK TO (OPEL - GENERAL MOTORS)	DL LOW-PRESSURE BLACK SPRINGLOCK TOOL (AUDI - VW - SKODA)	HIGH-PRESSURE GREEN SPRINGLOCK TOOL (AUDI - VW - SKODA)
ArtNr. € RK1122 -	ArtNr. € RK1125 -	ArtNr. € RK1146 -	ArtNr. € RK1147 -
PACK OF 4 SPRINGLOCK TOOLS	PACK OF 4 SPRINGLOCK TOOLS	OPEL - GENERAL MOTORS SPRINGLOCK TOOLS KIT	AUDI - VW - SKODA SPRINGLOCK TOOLS KIT
ArtNr. € RL1018.01 -	ArtNr. € RL1019.01 -	ArtNr. € RL1017.01 -	ArtNr. € RK1205 -
LOW-PRESSURE SPECIAL SPRINGLOCK TOOL (SMART)	LOW-PRESSURE SPECIAL SPRINGLOCK TOOL (SMART)	SPECIAL SPRINGLOCK TOOL (MERCEDES W2111)	SMART SPRINGLOCK TOOLS KIT

Condenser Fin Comb and Straightener

It is a circular tool with 6 segments that allows to straighten the aluminum fin combs of evaporators and condensers without damaging them. It can be used with fin combs of the following dimensions: 6/8/10/12/14/15.



ArtNr.	€	8
RL1010.01	-	10

Cork Insulation Tape

Suitable for insulating complex components against condensation (service ports on external units, refrigeration pipes, fittings and connections). It adheres to all metals, for use on cold or hot pipes. Suitable also for protecting pipes from vibration and noise. The special protective film guarantees a clean application.

Length: 7,50 mt. Elongation: 100%.

02.

03.

Working temperature: -20°C / +90°C.

Transparent film for a clean application.

ArtNr.	€	F
TR1015.01	-	10

AUTOMOTIVE CHEMICAL SOLUTION

1

利雨

-

8

Contraction

1 1

0

(4)

Engi-Pro

Engine Oil Additive

ENGI-PRO is a treatment formulated to ensure greater engine oil protection. ENGI-PRO is a universal additive that can be used with all engine oils – either minerals and synthetics - and is suitable for both engines diesel than petrol. Reduces acid aggression of metals avoiding the formation of particles. It therefore improves lubrication reducing friction between the moving parts of the engine. Reduces lubricant consumption and improves circulation of oil especially at cold temperatures. Delete or reduces excessive oil consumption and smokiness of exhaust fumes. Restores lost compression, the power and responsiveness of the engine.

Benefits:

 ✓ Lubricant consumption decreases. ✓ Promotes the high-temperature pressure seal of the oil.
 ✓ Increases load capacity of the lubricating film.
 ✓ Improve the performance of the engine and the anti-friction and anti-wear properties of the oil. ✓ Decreases the exhaust smoke caused by an excessive oil combustion. ✓ Compatible with mineral, synthetic and semi-synthetic oils.
 ✓ Suitable to all petrol and diesel engines.

Dosage:

To top up or after the change, add directly into the oil tank when the engine is cold 50 mL per liter of oil (250 mL is the ideal quantity for a car engine which contains 4-6 Litres of oil).



ArtNr.	Description	€	8	***
TR1179.O.01	350 mL Bottle	-	-	-



02.

01.

Engi-Pro

Engine Cleaning Additive

ENGI-NET is the engine cleaning treatment compatible with all types of mineral engine oil and synthetic, suitable for both diesel and petrol. ENGI-NET is designed to remove metal powders, acidity and residues that can compromise the work of the new lubricant inserted.

It is recommended to treat before every oil change.

Dosage:

250 mL is the ideal quantity for a normal car engine with 4-6 Litres oil. For bigger engine consider 50 mL of product per litre of oil.





 Art.-Nr.
 Description
 €
 ♥

 TR1178.0.01
 350 mL Bottle



<section-header><section-header><section-header><section-header><section-header><text><text><text></text></text></text></section-header></section-header></section-header></section-header></section-header>	<image/>
ArtNr. Description € ♥ TR1136.P.01 5 Litres Tank - 02 164 TR1136.K.01 1 Litre Tank - 06 574	
<section-header><section-header><section-header><section-header><section-header><section-header><section-header><text></text></section-header></section-header></section-header></section-header></section-header></section-header></section-header>	<image/>
ArtNr. Description £ 😒 📥	**

ArtNr.	Description	€	8	* **
TR1137.P.01	5 Litres Tank	-	02	168
TR1137.K.01	1 Litre Tank	-	06	570

DPF Flush Gun

Specific Equipment for DPF Flushing

DPF Flush Gun is a specific equipment working with compressed air designed to clean the diesel particulate filters. Equipped with easily interchangeable probes that can be used with all models of particulate filters.

Technical Features:

- ✓ Gun with rubber grip.
- ✓ Interchangeable rigid probe.
- ✓ Interchangeable flexible probe.
- ✓ Connection for compressed air with 1/4" ball valve.
- FKM gaskets resistant also to the most aggressive liquids.
- ✓ Rilsan PA11 hose resistant also to the most aggressive liquids.
- ✓ 0÷12 Bar gauge.
- ✓ 10 Bar safety valve.

ArtNr.	Description	€	8	* **
RP1052.0	1 DPF FLUSH GUN	-	01	110
RK1359	Tank with Suction Tube and Hose $\textcircled{2}$	-	01	-
RK1360	Gun with Hose and Probes 1 (Flexible and Rigid)	-	01	-

Flush G

EFFECO

0

1

2

DPF Flush Kit

04.

03.

DPF Flushing Complete Kit

DPF Flush KIT is a complete kit for the cleaning of diesel particulate filters and catalysts.

The kit includes:

DPF FLUSH – DPF Cleaning Liquid – 5 Litres Tank

DPF RINSE – DPF Rinsing Liquid – 5 Litres Tank

DPF FLUSH GUN – Specific Equipment for DPF Flushing

Practical and sturdy plastic case.

ArtNr.	€	8	***
RK1350	-	01	30



📑 AT Flush

01.

Automatic Transmission Flushing Fluid

AT FLUSH is a product specifically designed for the cleaning of the automatic gearbox.

Once added, it perfectly cleans the hydraulic central of the system, eliminating all the shifts caused by residues of the clutch and the flywheel. It dissolves all the oily sediments formed from the emulsion of the oil, without damaging substances held by magnets.

Benefits:

✓ It can also be used in the ZF, CVT, DSG, MERCEDES, GM, MULTITRONIC, AISIN automatic gearbox. ✓ It is directly added to the oil of the gearbox. ✓ It can be used with automatic and manual flushing stations.



Egr Valve Cleaner



01.

Cleaning Treatment for EGR Valves

EGR VALVE CLEANER is a treatment suitable for all diesel engines with any power system. Thanks to its dense and persistent foam formulation containing nanotechnologies, it cleans and unlocks the EGR valves clogged with residues of the combustion of exhaust gases, tar, carbon deposits, gums and lacquers. The nanotechnologies of EGR VALVE CLEANER penetrate deeply into the texture of the encrustation, weakening its bonds and facilitating its detachment. Its degreasing and descaling power makes it possible to free even paralyzed valves, bringing them back to their original efficiency.

Benefits:

✓ High degreasing and descaling power. ✓ Suitable to cleaning turbo intake pipes and valves. ✓ Suitable for all diesel engines. ✓ It cleans the intake system and the flowmeter. ✓ It restores the air circulation towards the combustion chamber and eliminates the voids in acceleration. ✓ It ensures perfect combustion. ✓ It reduces fuel consumption. ✓ Compatible with all particulate filters and catalytic converters.





12

1344

Brilliant Engine



Multi-purpose UV Dye for Engine Parts

BRILLIANT ENGINE is a fluorescent UV dye designed to detect even the smallest leak in many parts and components of the vehicles engine. BRILLIANT ENGINE can be introduced in: engine lubricants, hydraulic oil, power steering oil, transmission oil and diesel or petrol fuels. Add 7,5 mL for every 1 Litre of oil.

Benefits:

Most effective in engine lubricant and fuels.Visible to any UV lamp.

ArtNr.	Description	€	8	* **
TR1203.F.P1	100 mL Bottle	-	30	3300
TR1203.Q	250 mL Bottle	-	13	728
TR1203.01	350 mL Bottle	-	12	672
TR1203.K	1 Litre Bottle	-	04	192



Stop Up



01.

Universal Leak Stop for Engine

STOP UP is a leak stop specially formulated to stop micro-leaks that can occur in all types of engines (petrol, diesel, hybrids, etc.). Formulated to restore elasticity and volume to the engine sealing elastomers and to restore their sealing power.

The repair of the leak occurs during the normal use of the vehicle, at the latest in 24 hours.

Benefits:

✓ It does not create deposits in the engine and does not obstruct small oil passages. ✓ It works for car, motorcycle, agricultural machine, boats etc. ✓ It eliminates and prevents oil leaks in internal and external gaskets of the engine. ✓ It restores the original properties of gaskets and sealing O-rings (softness, elasticity, etc.). ✓ It stops leaks by acting on rubber, synthetic and natural gaskets (viton, silicone, polyacrylate, buna-type N). ✓ It eliminates and prevents leaks and from the seal rings and elastomer seals. ✓ Compatible with all types of mineral, semi-synthetic and synthetic lubricants. ✓ Compatible with vehicles equipped with particulate filters or catalytic converters. ✓ Suitable for all aspirated or supercharged petrol and diesel engines, including the latest ones generation equipped with LPG and methane. ✓ It does not clog the oil filters.

Dosage:

Use 60 mL of STOP UP for every litre of engine oil.

DO NOT USE STOP UP HYDRAULIC IN BRAKE SYSTEMS!



ArtNr.	Description	€	B	***
TR1061.E	01 Cartridge of 60 mL	-	15	840
TR1061.E4	04 Cartridge of 60 mL	-	06	288
TR1061.01.EC	250 mL Bottle	-	-	-
TR1061.Q.P2	250 mL Bottle	-	24	2880
TR1061.M.P2	500 mL Bottle	-	12	1080
TR1061.K.P2	1 Litre Bottle	-	12	756



02.

Universal Leak Stop for Power Steering

STOP UP POWER STEERING is a specifically formulated leak stop to seal any type of leak that occurs in the vehicle power steering circuit.

Benefits:

 \checkmark It restores the original conditions of the hardened, deformed and worn gaskets. \checkmark Repair of leaks occurs during normal use of the vehicle, at most in two days.

Dosage:

Use 60 mL of STOP UP POWER STEERING for each litre of power steering oil.



DO NOT USE STOP UP HYDRAULIC IN BRAKE SYSTEMS!

Art.-Nr.

TR1144.Q.P2 250 mL Bottle

Description

2880

8

24

Stop Up Transmission




Universal Leak Stop for Transmissions

STOP UP TRANSMISSION is a specifically formulated leak stop to seal any type of leak that occurs in vehicles transmissions.

> ✓ It restores the original conditions of the hardened, deformed and worn gaskets.
> ✓ Repair of leaks occurs during normal use of the vehicle, at most in two days. ✓ It reduces noise and vibrations.

> Use 60 mL of STOP UP TRANSMISSION for every litre of transmission oil.

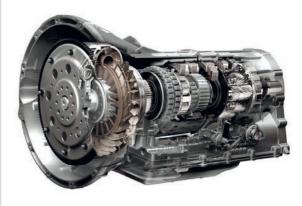



DO NOT USE STOP UP HYDRAULIC **IN BRAKE SYSTEMS!**

Stop Up Hydraulic

04.

Universal Leak Stop for Hydraulic Systems

STOP UP HYDRAULIC is a specifically formulated leak stop to seal any type of leak that occurs in the hydraulic systems of special vehicles such as earthmoving machines, agricultural vehicles and hydraulic pumps.

Benefits:

✓ It restores the original conditions of the hardened, deformed and worn gaskets.
 ✓ Repair of leaks occurs during normal use of the vehicle, at most in two days.

Dosage:

Use 60 mL of STOP UP HYDRAULIC for every litre of hydraulic oil.





TR1146.K.P2 1 Litre Bottle 12

Description



DO NOT USE STOP UP HYDRAULIC IN BRAKE SYSTEMS!

756

Brilliant Coolant

UV Dye for Vehicles Engine Coolant

BRILLIANT COOLANT is a fluorescent UV dye designed to detect even the smallest leak in the components of the vehicles cooling system.

Benefits:

01.

✓ Visible to any UV Lamp. ✓ Add 30 mL for each vehicle.

ArtNr.	Description	€	F	***
TR1201.F.P1	100 mL Bottle	-	30	3300
TR1201.Q	250 mL Bottle	-	13	728
TR1201.0	350 mL Bottle	-	12	672
TR1201.K	1 Litre Bottle	-	04	192

Bluet

02.

Coolant

Leak Stop for Vehicles Cooling Systems

BLUET is a permanent leak stop for leaks that occur in engine cooling systems. It stops and prevents leakages and sweating of liquid from the radiator, hoses and from connections of the cooling system. Particularly effective with leaks in blown head gaskets, racked heads, warped heads, cracked blocks, leaking heater cores and freeze plugs.

Benefits:



 ✓ It does not contain any filings or agglomerates of residues that could damage the components of the cooling system. ✓ It blocks and prevents cracks in the engine block, joints, sleeves and all other leaks in the cooling circuit (radiator, pipes, water pumps). ✓ Withstands high temperatures, pressures and vibrations of modern engines. ✓ It can be used on petrol, diesel and LPG engines with water cooling. ✓ It is formulated to act both diluted 50% water and glycol, and with water only. ✓ Maximum compatibility with all the elements Compatible with any type of radiator (aluminum, plastic, etc.). ✓ Can be added to all types of coolant. ✓ Easy to use as it can stay in the system.

Dosage:

Add 250 mL for systems with a maximum capacity of 5 litres.



ArtNr.	Description	€	¥	** *
TR1041.Q.P2	250 mL Bottle	-	24	2880
TR1041.M.P2	500 mL Bottle	-	12	1080
TR1041.K.P2	1 Litre Bottle	-	12	756

C Zeus

03.

Flushing Fluid for Vehicles Cooling Systems

ZEUS is a flushing fluid to clean vehicles cooling systems. It removes residues of grease, rust, sludge and scale that formed over time inside cooling systems. Thanks to its formulation and the presence of nanotechnologies, it removes accumulated deposits of dirt, dissolving them and keeping them in suspension until they are taken out of the cooling system.

Dosage:

500 mL Bottle suitable for systems up to 8 L. 1 Liter Bottle suitable for systems up to 16 L.

>	100 Pinazy

ArtNr.	Description	€	P	***
TR1147.M.P2	500 mL Bottle	-	02	1080
TR1147.K.P2	1 Litre Bottle	-	06	570

🖪 Uran

04.

Lubricant with Anticorrosion Protection for Water Pumps

URAN is a permanent additive that can be introduced into vehicles cooling systems after their washing and after the introduction of the new coolant. It does not affect any components of the cooling system.

Dosage:

500 mL Bottle suitable for systems up to 8 L. 1 Liter Bottle suitable for systems up to 16 L.

ArtNr.	Description	€	8	***
TR1153.M.P2	500 mL Bottle	-	02	1080
TR1153.K.P2	1 Litre Bottle	-	06	570



Antiblock



Complete Treatment for Flushing and Lubrication of Vehicles Cooling Systems


This smart package contains the necessary products for a full washing (ZEUS) and lubrication (URAN) treatment of vehicles cooling systems.

Dosage:

500 mL Bottle suitable for systems up to 8 L. 1 Liter Bottle suitable for systems up to 16 L.

ArtNr.	Description	€	8	* **
RK1371	Kit of two 500 mL Bottle	-	01	-
RK1373	Kit of two 1 Litre Bottle	-	01	84



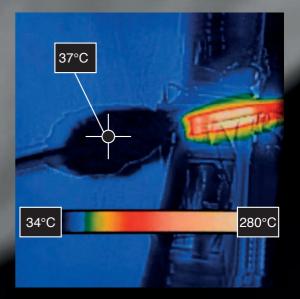

SOLDERING HEAT BARRIER

Stop-Heat

Anti-Heat Paste for Soldering

During soldering and brazing operations, STOP-HEAT blocks the heat conduction, protecting surfaces and preventing areas surrounding the welding point from burning or deforming. Its formula in paste adheres without dripping, slipping or leaving residues, protecting also the painted and varnished surfaces by colour changes.

Benefits:

01.

✓ Re-usable up to 40 times. ✓ Easy to use. ✓ Safe and non-toxic. ✓ It absorbs the heat emanated from the soldering or brazing torch, preventing the areas surrounding the welding point from burning or deforming. ✓ It protects components and materials during soldering to avoid expensive damages caused by heat. ✓ It does not drip or slip.

ArtNr.	Description	€	8	***
TR1173.01	500gr Jar	-	12	-





Protect Gel

02.

Anti-Heat Gel for Soldering PROTECT GEL is a special product in gel formulated to protect the surfaces surrounding the point of contact of the flame used during welding or brazing operations from the effect of heat.

Benefits:

✓ Easy to use. ✓ Safe and non-toxic. ✓ It absorbs the heat from the welding or soldering torch avoiding the areas surrounding the affected point to burn or deform. ✓ It protects components and materials during welding operations to avoid costly damages caused by heat. ✓ It protects painted and varnished surfaces by the colour change due to the heat of the welding torch. ✓ Gel formula adheres to the surface to be protected without drip, stain or leave residue.

ArtNr.	Description	€	8	* **
TR1141.K.01	1 Litre Bottle with diggers	-	06	570



Shield-It H₂O

03.

Water based Protective Barrier Spray for Soldering - Non-Flammable

SHIELD-IT H₂O is a water based product in aerosol can to be used as protective solution for the treated soldering area. By forming a protective shield, SHIELD-IT H₂O prevents drops or welding splashes from sticking out of various metals and materials close to the soldering area, also allowing the easy removal of soldering residues. Its water based formula caractherizes SHIELD-IT H₂O as a non-aggressive product for the operator. SHIELD-IT H₂O can be used in combination with Protect Gel (which avoids burns of all the materials close to the soldering area and reduce the heat exchange).

Benefits:

✓ Easy to use. ✓ Non-flammable. ✓ Safe for the Operator. ✓ Useful as a temporary protection against weld spatters. ✓ Easy removable with a cloth.

ArtNr.	Description	€	8	*
TR1164.N.01	400 mL Aerosol Can	-	12	1344



Note

#madeinerrecom



ERRECOM SPA Via Industriale, 14 25030 Corzano (BS) Italy +39 030 971 9096 Proud to be members of







